TEST REPORT: 719182235-MEC10-EO

Date:

21 JUN 2010

Tel: +65 68851291 Fax: +65 67784301

Client's Ref: -

Email: huayi.chen@tuv-sud-psb.sq

Note: This report is issued subject to TÜV SÜD PSB's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.



Choose certainty.

Add value.

SUBJECT

Metal toxicity test of tap fittings to meet the requirements and compliance to AS/NZS 4020:2005 Appendix H.

CLIENT

Hoe Kee Hardware Pte Ltd 8 Genting Road #02-00, The Blue Building Singapore 349472

Attn: Ms Nancy Quah

SAMPLE SUBMISSION DATE

21 APR 2010

DESCRIPTION OF PRODUCT

Product

"BLANCO" Brand Sink Mixer

Brand

BLANCO

Model

No.512322

DESCRIPTION OF SAMPLE

Two samples of the tap fittings as per "DESCRIPTION OF PRODUCT" was tested.

METHOD OF TEST

AS/NZS 4020:2005 Products for use in contact with drinking water. (To be evaluated in accordance with WHO Guidelines for Drinking Water Quality, 2004.)

- 1) Sample Preparation Appendix A.
- 2) Scaling Factor Derivation and Application, Appendix B.

Phone: +65-6885 1333

Fax: +65-6776 8670

www.tuv-sud-psb.sg

Co. Reg: 199002667R

E-mail: testing@tuv-sud-psb.sg

3) Test Method – Extraction of Metals, Appendix H (Elemental Analysis by ICP-MS).



Laboratory: TÜV SÜD PSB Pte. Ltd. No.1 Science Park Drive Singapore 118221



LA-2007-0380-A LA-2007-0380-A-1 LA-2007-0381-F LA-2007-0382-B LA-2007-0383-G LA-2007-0384-G LA-2007-0386-C

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calizations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.

Regional Head Office: TÜV SÜD Asia Pacific Pte. Ltd. 3 Science Park Drive, #04-01/05 The Franklin, Singapore 118223

TEST REPORT: 719182235-MEC10-EO

21 JUN 2010



RESULTS

| Item | Sample Marked | "BLANCO" Bra (7 th Exti | | Requirements |
|------|-------------------------------|---------------------------------------|------------------------------|---|
| _ | Elements (unit = mg/litre) | Shower Mixer / Sektor 21060 | Sink Mixer / Matrix 19160 | WHO Cuidelines for Drinking Water Quality (2004) (mg/litre) max |
| 1 | Antimony, Sb | < 0.003 | < 0.003 | 0.02 |
| 2 | Arsenic, As | < 0.007 | < 0.007 | 0.01 |
| 3 | Barium, Ba | 0.02 | 0.02 | 0.7 |
| 4 | Cadmium, Cd | < 0.001 | < 0.001 | 0.003 |
| 5 | Chromium, Cr | < 0.01 | 0.01 | 0.05 |
| 6 | Copper, Cu | < 0.1 | < 0.1 | 2 |
| 7 | Lead, Pb | < 0.01 | < 0.01 | 0.01 |
| 8 | Mercury, Hg | < 0.001 | < 0.001 | 0.001 |
| 9 | Molybdenum, Mo | < 0.01 | < 0.01 | 0.07 |
| 10 | Nickel, Ni | < 0.01 | < 0.01 | 0.02 |
| 11 | Seleni <mark>u</mark> m, Se | < 0.01 | < 0.01 | 0.01 |
| 12 | Silver, Ag | < 0.01 | < 0.01 | 0.1 * |

Note:

<

: Less than

The requirement for silver, (Ag) is taken from AS/NZS 4020:2005.

Scaling Factor :

Not applied, the product was tested by in-product exposure method.

REMARKS

- 1) Both "Sample 1" and "Sample 2" water extracts satisfied the WHO Guidelines for Drinking Water Quality (2004) with respect to the 12 itemized toxic metals.
- 2) The results stated in this report relate to sample or samples of the product submitted for testing. Any changes in the material formulation, the process manufacture, the method of application, or the surface area-to-volume ratio in the end use, could affect the suitability of the product for the use in contact with drinking water.

MS ELSIE OW

TECHNICAL EXECUTIVE

DR CHEN HUAYI

ASSISTANT VICE PRESIDENT ELEMENTAL AND ENVIRONMENTAL ANALYSIS CHEMICAL & MATERIALS

TEST REPORT: 719182235-MEC10-EO

21 JUN 2010



This Report is issued under the following conditions:

- 1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
- Unless otherwise requested, this report shall contain only technical results carried out by TÜV SÜD PSB. Analysis and interpretation of the
 results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for,
 by the Client.
- 3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
- 4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
- 5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through TÜV SÜD PSB, unless the Client has authorised TÜV SÜD PSB in writing to do so.
- 6. TÜV SÜD PSB may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such additions or amendments shall be binding on the Client.
- 7. All copyright in the report shall remain with TÜV SÜD PSB and the Client shall, upon payment of TÜV SÜD PSB's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that TÜV SÜD PSB may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
- 8. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
- 9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
- 10. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

March 2010

TEST REPORT: 719182235-CHM10-02-PGK(MEC)

Date:

29 SEP 2010

Tel: +65 68851321 Fax: +65 67784301

Client's Ref:

Email: tai-hoe.lin@tuv-sud-psb.sg

Note: This report is issued subject to TÜV SÜD PSB's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.



Choose certainty.

Add value.

SUBJECT

Salt Spray Test on Tap Fitting

TESTED FOR

Hoe Kee Hardware Pte Ltd 8 Genting Road #02-00, The Blue Building Singapore 349472

Attn: Ms Nancy Quah

SAMPLE SUBMISSION DATE

21 Apr 2010

DATE TEST CONDUCTED

23 Apr to 03 May 2010

DESCRIPTION OF SAMPLE

One sample of tap fitting, described as follows, was submitted by the above client to the Mechanical Centre of TÜV SÜD PSB Pte Ltd

Type of fitting

Sink Mixer

Brand

"BLANCO"

Model

512322

Quantity

1 unit



Laboratory: TÜV SÜD PSB Pte. Ltd. No.1 Science Park Drive Singapore 118221



Phone: +65-6885 1333

Fax: +65-6776 8670

www.tuv-sud-psb.sg Co. Reg: 199002667R

E-mail: testing@tuv-sud-psb.sg



LA-2007-0380-A LA-2007-0380-A-1 LA-2007-0381-F LA-2007-0382-B LA-2007-0383-G LA-2007-0384-G LA-2007-0385-E LA-2007-0386-C

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.

Regional Head Office: TÜV SÜD Asia Pacific Pte. Ltd. 3 Science Park Drive, #04-01/05 The Franklin, Singapore 118223

TEST REPORT: 719182235-CHM10-02-PGK(MEC)

29 SEP 2010



METHOD OF TEST

1. BS EN 248: 2002

"Sanitary tapware: General specification for electrodeposited coatings of Ni-Cr"

Clause 5.1 : Corrosion resistance test – test with neutral saline spray

2. ISO 9227: 2006

"Corrosion tests in artificial atmospheres - Salt Spray Tests" - NSS Test

Test Conditions:

Concentration of salt solution : 50 ± 5 g/L NaCl

S.G. of condensate : 1.036 pH of condensate : 6.5 - 6.9

Volume of condensate : 1.1 - 1.7 ml/hr/80 cm²

Test chamber temperature : 35 ± 2°C

Exposure period : 200 hours spraying and 48 hours of rest period

at 35°C after the first 100 hour of spraying

Method of Cleaning

Before test : None

After test : Water-rinse and air-dry

RESULTS

| "BLANCO" Sink Mixer Model 512322 | BS EN 248 : 2002 Clause 5.1.3 Requirement | |
|---|--|--|
| Less than 0.1% of surfaces showed pitting and white spots | Defects should be less than or equal to 0.1% of total surface area, and not exceed a dimension of 0.3 mm | |

Remarks:

Corrosion resistance of the sample was found to have complied with

BS EN 248: 2002 Clause 5.1.3 requirement.

MS PECK GEOK KHOON

TECHNICAL EXECUTIVE

MRS WONG-LIN TAI HOE PRODUCT MANAGER

COATINGS

CHEMICAL & MATERIALS

TEST REPORT: 719182235-CHM10-02-PGK(MEC)

29 SEP 2010



This Report is issued under the following conditions:

- 1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
- Unless otherwise requested, this report shall contain only technical results carried out by TÜV SÜD PSB. Analysis and interpretation of the
 results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for,
 by the Client.
- 3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
- 4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
- 5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through TÜV SÜD PSB, unless the Client has authorised TÜV SÜD PSB in writing to do so.
- 6. TÜV SÜD PSB may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such additions or amendments shall be binding on the Client.
- 7. All copyright in the report shall remain with TÜV SÜD PSB and the Client shall, upon payment of TÜV SÜD PSB's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that TÜV SÜD PSB may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
- 8. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
- 9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
- 10. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

March 2010



Note: This report is issued subject to TÜV SÜD PSB's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.

Choose certainty.
Add value.

SUBJECT:

Testing of Tap/Fitting/Mixers.

TESTED FOR:

Hoe Kee Hardware Pte Ltd 8 Genting Road #02-00, The Blue Building Singapore 349472

Attn: Ms. Nancy Quah

METHOD OF TEST:

PUB Requirement for Water Efficiency Labelling Scheme

BS EN 817 : 2008
Sanitary tapware – Mechanical mixer (PN 10) – General technical specifications

(Jur

Aldkhy.



Laboratory: TÜV SÜD PSB Pte. Ltd. No.1 Science Park Drive Singapore 118221 Phone: +65-6885 1333 Fax: +65-6776 8670 E-mail: testing@tuv-sud-psb.sg

www.tuv-sud-psb.sg Co. Reg : 199002667R Regional Head Office: TÜV SÜD Asia Pacific Pte. Ltd. 3 Science Park Drive, #04-01/05 The Franklin, Singapore 118223



DESCRIPTION OF SAMPLE:

Product

Tap/Fittings/Mixers Blanco

Brand Name

| S/N | Description | Model |
|-----|-------------|-----------------------|
| 1. | Sink Mixer | 512322 |
| 2. | Sink mixer | 512324 |
| 3. | Sink Mixer | 514019 |
| 4. | Sink Mixer | 512402 |
| 5. | Sink Mixer | 514209 |
| 6. | Sink Mixer | 512580 |
| 7. | Sink Mixer | 515584 |
| 8. | Sink Mixer | 515585 |
| 9. | Sink Mixer | 5 <mark>165</mark> 26 |
| 10. | Sink Mixer | 516671 |
| 11. | Sink Mixer | 516672 |
| 12. | Sink Mixer | 515987 |
| 13. | Sink Mixer | 513649 |

Note:

Refer to APPENDIX for photo.




TEST RESULTS:

Hydraulic Characteristics

1) Description: Sink Mixer Model: 512322

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo | |
|-----------------------|-----------------------------|--|---------------------------------|--------------|
| 0 | 0 | | | |
| 0.5 | 2.8 | | | |
| 1.0 | 3.6 | | | |
| 1.5 | 4.0 | / | | |
| 2.0 | 4.3 | Products/Fittings Sink Taps & Mixers/Bib Taps 6 to 8 litres/min (1 tick) 4 to 6 Litres/min (2 ticks) | | |
| 2.5 | 4.3 | | | |
| 3.0 | 4.3 | | | |
| 3.5 | 4.3 | | | |
| 4.0 | 4.4 | 4 litres/min or less (3 ticks) | " Blanco " 512322 Sink Mixer | |
| 4.5 | 4.5 | | | Sirin Miller |
| 5.0 | 4.7 | | | |
| 5.5 | 4.9 | And the second s | | |

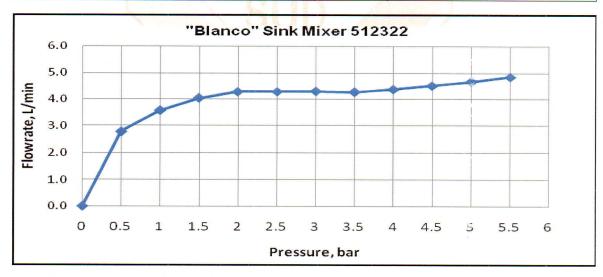

(Jur

aldkhy.




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

2) Description: Sink mixer

| Flow Pressure (bar) | I low Rate Requirements for | | Photo |
|------------------------|-----------------------------|---|---------------------------------|
| 0 | 0 | | |
| 0.5 | 2.9 | | |
| 1.0 | 3.6 | | |
| 1.5 | 4.0 | / | |
| 2.0 | 4.3 | Products/Fittings Sink Taps & Mixers/Bib Taps 6 to 8 litres/min (1 tick) 4 to 6 Litres/min (2 ticks) | |
| 2.5 | 4.5 | | |
| 3.0 | 4.3 | | |
| 3.5 | 4.4 | | |
| 4.0 | 4.5 | 4 litres/min or less (3 ticks) | " Blanco " 512324 Sink Mixer |
| 4.5 | 4.6 | | |
| 5.0 | 4.7 | | |
| 5.5 | 4.9 | | |

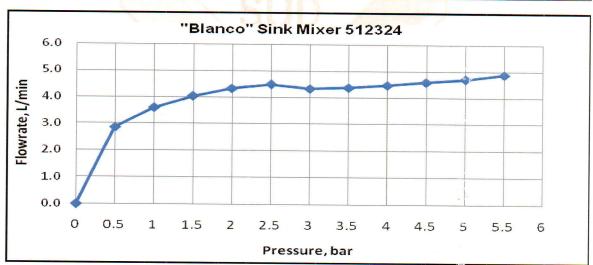

(hur

aldkhy.




Hydraulic Characteristics

Hydraulic Characteristics

3) Description: Sink Mixer Model: 514019

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo |
|--------------------------|--------------------------|--|---|
| 0 | 0 | | |
| 0.5 | 2.9 | 1 12 | |
| 1.0 | 3.5 | | |
| 1.5 | 4.0 | / | Products/Fittings alk Taps & Mixers/Bib Taps S to 8 litres/min (1 tick) |
| 2.0 | 4.0 | | |
| 2.5 | 4.2 | Ollik Tapa & Mixera/Bib Tapa | |
| 3.0 | 4.3 | 6 to 8 litres/min (1 tick) | |
| 3.5 | 4.5 | 4 to 6 Litres/min (2 ticks) 4 litres/min or less (3 ticks) | |
| 4.0 | 4.7 | | "Blanco " 514019 Sink Mixer |
| 4.5 | 4.8 | | N |
| 5.0 | 5.0 | | |
| 5.5 | 5.2 | | |

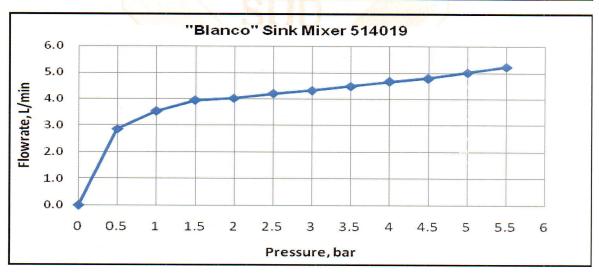

Chur




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

4) Description: Sink Mixer Model: 512402

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo | |
|------------------------|-----------------------------|--|--|--|
| 0 | 0 | | | |
| 0.5 | 2.7 | | | |
| 1.0 | 3.4 | Products/Fittings Sink Taps & Mixers/Bib Taps 6 to 8 litres/min (1 tick) 4 to 6 Litres/min (2 ticks) 4 litres/min or less (3 ticks) | | |
| 1.5 | 3.8 | | | |
| 2.0 | 4.1 | | The state of the s | |
| 2.5 | 4.2 | | | |
| 3.0 | 4.3 | | | |
| 3.5 | 4.4 | | "Blanco" 512402 | |
| 4.0 | 4.6 | | | |
| 4.5 | 4.8 | | | |
| 5.0 | 5.0 | | | |
| 5.5 | 5.2 | | | |

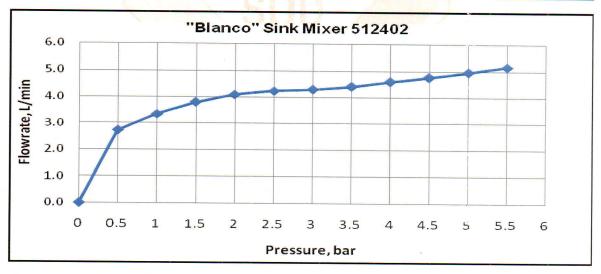

Chur

aldhy.



TEST RESULTS: (Cont'd)

Hydraulic Characteristics

Flow Rate Requirements for

Water Efficiency Labelling

5) Description: Sink Mixer


| Model: 51420 | 9 |
|--|--------------------------|
| Flow Pressure (bar) | Flow Rate (litres/min) |
| 0 | 0 |
| 0.5 | 2.9 |
| (bar) | 3.5 |
| | 4.0 |
| 2.0 | 4.2 |
| 2.5 | 4.2 |
| 3.0 | 4.3 |
| 3.5 | 4.4 |
| Flow Pressure (bar) 0 0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0 4.5 | 4.6 |
| 4.5 | 4.8 |
| 5.0 | 5.0 |

5.2


5.5

Products/Fittings
Sink Taps & Mixers/Bib Taps

6 to 8 litres/min (1 tick)
4 to 6 Litres/min (2 ticks)
4 litres/min or less (3 ticks)



Photo

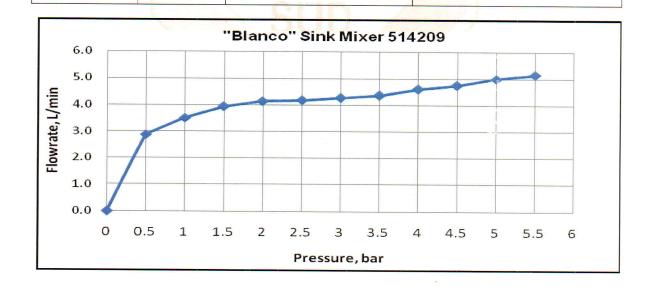

Chur




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

6) Description: Sink Mixer Model: 512580

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo | |
|---------------------|-----------------------------|---|-----------------------------------|--|
| 0 | 0 | | | |
| 0.5 | 2.7 | | | |
| 1.0 | 3.5 | | | |
| 1.5 | 3.9 | | | |
| 2.0 | 4.1 | Products/Fittings Sink Taps & Mixers/Bib Taps 6 to 8 litres/min (1 tick) | | |
| 2.5 | 4.3 | | | |
| 3.0 | 4.4 | | | |
| 3.5 | 4.5 | 4 to 6 Litres/min (2 ticks) 4 litres/min or less (3 ticks) | | |
| 4.0 | 4.7 | Blanco | * Blanco * \$12580 Sink Misser | |
| 4.5 | 4.8 | | | |
| 5.0 | 4.9 | | | |
| 5.5 | 5.3 | | | |

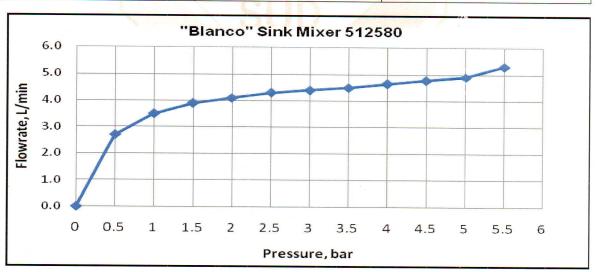

Chur




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

7) Description: Sink Mixer

| Mod | el: | 51 | 558 | 4 |
|---------|----------|----|-----|---|
| III O G | . | • | ~~ | _ |

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo |
|--------------------------|--------------------------|---|---------------------------------|
| 0 | 0 | | |
| 0.5 | 3.0 | | |
| 1.0 | 3.9 | | |
| 1.5 | 4.6 | | |
| 2.0 | 5.2 | Products/Fittings Sink Taps & Mixers/Bib Taps | |
| 2.5 | 5.6 | | |
| 3.0 | 6.0 | 6 to 8 litres/min (1 tick) | |
| 3.5 | 6.1 | 4 to 6 Litres/min (2 ticks) | |
| 4.0 | 6.2 | 4 litres/min or less (3 ticks)) | " Blanco " 515584 Sink Mixer |
| 4.5 | 6.3 | | |
| 5.0 | 6.4 | | |
| 5.5 | 6.7 | | |

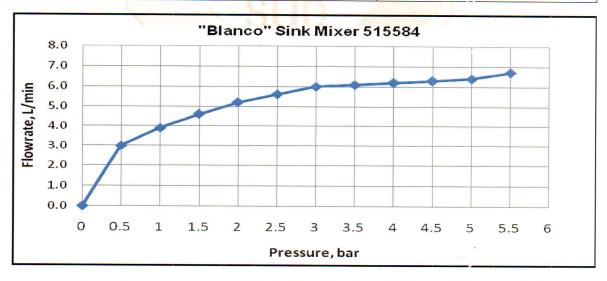

(hr




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

8) Description: Sink Mixer Model: 515585

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo | |
|--------------------------|--------------------------|---|-------------------------------|--|
| 0 | 0 | | | |
| 0.5 | 3.1 | | | |
| 1.0 | 3.9 | Products/Fittings Sink Taps & Mixers/Bib Taps 6 to 8 litres/min (1 tick) 4 to 6 Litres/min (2 ticks) | | |
| 1.5 | 4.5 | | 100 | |
| 2.0 | 4.9 | | | |
| 2.5 | 5.2 | | | |
| 3.0 | 5.5 | | | |
| 3.5 | 5.8 | | | |
| 4.0 | 6.2 | 4 litres/min or less (3 ticks)) | "Blanco" 515585 Sink Mixer | |
| 4.5 | 6.3 | | | |
| 5.0 | 6.4 | | | |
| 5.5 | 6.7 | | | |

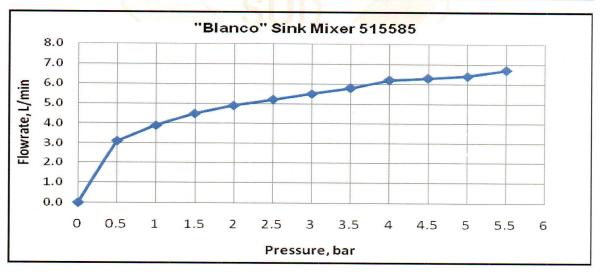

Chur

aldehy.




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

9) Description: Sink Mixer Model: 516526

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo |
|--------------------------|-----------------------------|---|-----------------------------------|
| 0 | 0 | | A Section of Section 2 |
| 0.5 | 3.0 | | |
| 1.0 | 3.5 | | |
| 1.5 | 4.0 | | |
| 2.0 | 4.1 | Products/Fittings Sink Taps & Mixers/Bib Taps | |
| 2.5 | 4.2 | Cilil Taps a Mindis/Dib Taps | |
| 3.0 | 4.3 | 6 to 8 litres/min (1 tick) | |
| 3.5 | 4.4 | 4 to 6 Litres/min (2 ticks) 4 litres/min or less (3 ticks)) | |
| 4.0 | 4.6 | 4 littles/filliff of less (3 ticks)) | |
| 4.5 | 4.8 | | ** Blanco ** 916526 Sink Mixer |
| 5.0 | 4.9 | | |
| 5.5 | 5.1 | Comp. | |

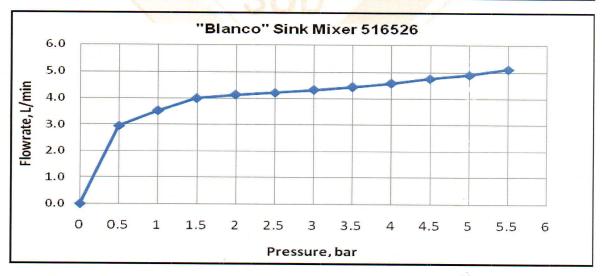

(hur

Stakeling.




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

10) Description: Sink Mixer Model: 516671

| Woder: 51667 | | | |
|-----------------------|------------------------|--|-------------------|
| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo |
| 0 | 0 | | |
| 0.5 | 3.1 | | |
| 1.0 | 3.7 | | |
| 1.5 | 3.9 | | |
| 2.0 | 4.0 | Products/Fittings Sink Taps & Mixers/Bib Taps | |
| 2.5 | 4.2 | Ciril Tapa & Mixera/Dib Tapa | |
| 3.0 | 4.3 | 6 to 8 litres/min (1 tick) | |
| 3.5 | 4.4 | 4 to 6 Litres/min (2 ticks) 4 litres/min or less (3 ticks) | * Blance * S16671 |
| 4.0 | 4.6 | | Sink Mixer |
| 4.5 | 4.8 | | |
| 5.0 | 5.0 | | |
| 5.5 | 5.2 | Crin / | |

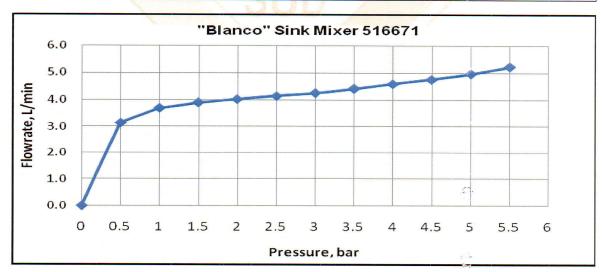

(hur

aldhy.




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

11) Description: Sink Mixer Model: 516672

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo |
|---------------------|-----------------------------|---|--|
| 0 | 0 | | |
| 0.5 | 3.6 | | |
| 1.0 | 4.4 | | |
| 1.5 | 5.1 | | |
| 2.0 | 5.4 | Products/Fittings Sink Taps & Mixers/Bib Taps | |
| 2.5 | 5.7 | Ciril Taps & Mixers/Bib Taps | |
| 3.0 | 5.8 | 6 to 8 litres/min (1 tick) | |
| 3.5 | 6.0 | 4 to 6 Litres/min (2 ticks) 4 litres/min or less (3 ticks)) | |
| 4.0 | 5.8 | + intes/illin or less (3 ticks)) | * Blanco * 516672 Sink Mixer |
| 4.5 | 5.9 | | GIRO CONTRACTOR OF THE CONTRAC |
| 5.0 | 6.1 | | |
| 5.5 | 6.5 | Cirin / | |

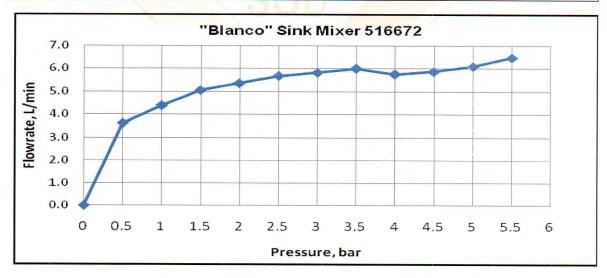

(hur




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

12) Description: Sink Mixer Model: 515987

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo |
|--------------------------|-----------------------------|---|--------------------------------|
| 0 | 0 | | |
| 0.5 | 3.5 | | |
| 1.0 | 4.6 | A contract to the contract to | |
| 1.5 | 5.5 | | |
| 2.0 | 5.7 | Products/Fittings Sink Taps & Mixers/Bib Taps | |
| 2.5 | 6.0 | Offic Taps & Mixers/Dib Taps | |
| 3.0 | 6.2 | 6 to 8 litres/min (1 tick) | |
| 3.5 | 6.4 | 4 to 6 Litres/min (2 ticks) | |
| 4.0 | 6.7 | 4 litres/min or less (3 ticks) | "Blanco " 515987 Sink Mixer |
| 4.5 | 6.8 | | H |
| 5.0 | 7.2 | | |
| 5.5 | 7.5 | Carrier I | |

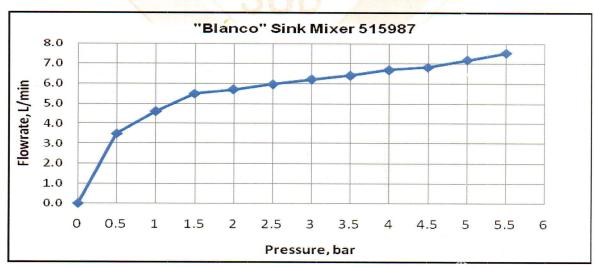

(hur

aldkhy.




TEST RESULTS: (Cont'd)

Hydraulic Characteristics

13) Description: Sink Mixer Model: 513649

| Flow Pressure (bar) | Flow Rate (litres/min) | Flow Rate Requirements for Water Efficiency Labelling | Photo |
|--------------------------|-----------------------------|--|-------------------------------|
| 0 | 0 | | |
| 0.5 | 2.7 | | |
| 1.0 | 3.5 | | |
| 1.5 | 4.2 | | |
| 2.0 | 4.4 | Products/Fittings Sink Taps & Mixers/Bib Taps | |
| 2.5 | 4.4 | Cilin Tapo a Mixoro, Dib Tapo | |
| 3.0 | 4.4 | 6 to 8 litres/min (1 tick) | |
| 3.5 | 4.5 | 4 to 6 Litres/min (2 ticks) 4 litres/min or less (3 ticks) | |
| 4.0 | 4.6 | 4 III es/IIII of less (3 licks) | "Blanco "513649 Sink Mixer |
| 4.5 | 4.7 | | |
| 5.0 | 4.8 | | |
| 5.5 | 5.0 | COURS A | |

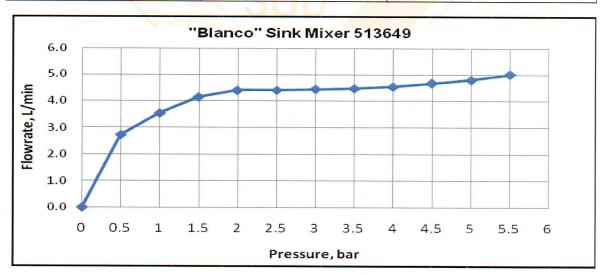

(hur

aldkhy.



TEST RESULTS:

(A1) Leaktightness Characteristics

| Sample Reference Characteristics | Sink mixer 516672 | BS EN 817 : 2008 Requirements |
|--|----------------------|--|
| Leaktightness of the obturator and of the mixing valve upstream of the obturator with the obturator in the closed position | Passed | Clause 8.3.2 a) Verification of leaktightness upstream of the obturator; Throughout the duration of the test there shall be no leakage or seepage through the walls |
| | Passed | b) Verification of leaktightness of the obturator; Throughout the duration of the test there shall be no leakage of the obturator |
| Leaktightness of the mixing valve downstream of the obturator with the obturator open | Passed | Clause 8.4.3 Throughout the duration of the test there shall be no leakage or seepage through the walls |
| Leaktightness of the obturator: cross flow between hot water and cold water | Passed | Clause 8.7.2 Throughout the duration of the test, there shall be no leakage or seepage at the outlet or at the end of the unconnected inlet. |

(B1) Hydraulic Characteristics

| Sample Reference Characteristics | Sink mixer 516672 | BS EN 817 : 2008 Requirements |
|--|----------------------|---|
| Determination of Flow rate; Test at 3.0 bar dynamic reference pressure | 5.8** | Clause 10.6.3 The flow rate measured at 3.0 bar shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 10 (Refer Appendix) |
| Determination of sensitivity; Supply pressure of 3.0 bar | Passed | Clause 10.7.5 The sensitivity measured shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 11 (Refer Appendix) |

[&]quot;**"Non-compliance with BS EN 817 : 2008 requirements (Please refer to page 28 of 35)

Chur

allehy.



TEST RESULTS: Cont'd

(C1) Torsion Test

| Sample Reference Characteristics | Sink mixer 516672 | BS EN 817 : 2008 Requirements |
|--|----------------------|--|
| Submitting the operating mechanism to a given torque to verify its strength with no water supplied | Passed | Clause 11.2.5 There shall be no deformation or other deterioration which impairs the function of the mixing valve; the mixing valve shall satisfy the requirement for leaktightness. |

(D1) Mechanical Performance under Pressure Characteristics

| Sample Reference Characteristics | Sink mixer 516672 | BS EN 817 : 2008 Requirements |
|---|----------------------|---|
| Mechanical behaviour upstream of the obturator - Obturator in the close position | Passed | Clause 9.4.2 Throughout the duration of the test, there shall be no permanent deformation of any part of the mixing valve |
| Mechanical behaviour downstream of the obturator - Obturator in the open position | Passed | Clause 9.5.2 There shall be no permanent deformation in any part of the mechanical mixing valve. |

(E1) Mechanical Endurance Characteristics

| Sample Reference Characteristics | Sink mixer 516672 | BS EN 817 : 2008 Requirements |
|------------------------------------|----------------------|--|
| 70,000 cycles of opening & closing | Passed | Clause 12.1.2 During the test, no component fracture, sticking or leakage shall occur. |

Chur

aldehy.



TEST RESULTS:

(A2) Leaktightness Characteristics

| Sample Reference Characteristics | Sink mixer 512580 | BS EN 817 : 2008 Requirements |
|--|----------------------|---|
| Leaktightness of the obturator and of the mixing valve upstream of the obturator with the obturator in the closed position | Passed | Clause 8.3.2 c) Verification of leaktightness upstream of the obturator; Throughout the duration of the test there shall be no leakage or seepage through the walls |
| | Passed | d) Verification of leaktightness of the obturator; Throughout the duration of the test there shall be no leakage of the obturator |
| Leaktightness of the mixing valve downstream of the obturator with the obturator open | Passed | Clause 8.4.3 Throughout the duration of the test there shall be no leakage or seepage through the walls |
| Leaktightness of the obturator: cross flow between hot water and cold water | Passed | Clause 8.7.2 Throughout the duration of the test, there shall be no leakage or seepage at the outlet or at the end of the unconnected inlet. |

(B2) Hydraulic Characteristics

| Sample Reference Characteristics | Sink mixer 512580 | BS EN 817 : 2008 Requirements |
|--|----------------------|---|
| Determination of Flow rate; Test at 3.0 bar dynamic reference pressure | 4.4** | Clause 10.6.3 The flow rate measured at 3.0 bar shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 10 (Refer Appendix) |
| Determination of sensitivity; Supply pressure of 3.0 bar | Passed | Clause 10.7.5 The sensitivity measured shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 11 (Refer Appendix) |

[&]quot;**"Non-compliance with BS EN 817: 2008 requirements (Please refer to page 28 of 35)

wr

aldehy.



TEST RESULTS: Cont'd

(C2) Torsion Test

| Sample Reference Characteristics | Sink mixer 512580 | BS EN 817 : 2008 Requirements |
|--|----------------------|---|
| Submitting the operating mechanism to a given torque to verify its strength with no water supplied | Passed | Clause 11.2.5 There shall be no deformation or other deterioration which impairs the function of the mixing valve; the mixing valve shall satisfy the requirement for leaktightness. |

(D2) Mechanical Performance under Pressure Characteristics

| Sample Reference Characteristics | Sink mixer 512580 | BS EN 817 : 2008 Requirements |
|---|----------------------|---|
| Mechanical behaviour upstream of the obturator - Obturator in the close position | Passed | Clause 9.4.2 Throughout the duration of the test, there shall be no permanent deformation of any part of the mixing valve |
| Mechanical behaviour downstream of the obturator - Obturator in the open position | Passed | Clause 9.5.2 There shall be no permanent deformation in any part of the mechanical mixing valve. |

(E2)Mechanical Endurance Test of Swivel spout

| Sample Reference Characteristics | Sink mixer 512580 | BS EN 817 : 2008 Requirements |
|----------------------------------|----------------------|--|
| Number of cycles : 80,000 | Passed | Clause 12.3.4 During the test, there shall be no deformation, fracture of the swivel nozzle or the device connecting it to the body or any leakage of the assembly |

Chur

aldhy.



(A3) Leaktightness Characteristics

| Sample Reference Characteristics | Sink mixer 515584 | BS EN 817 : 2008 Requirements |
|--|----------------------|---|
| Leaktightness of the obturator and of the mixing valve upstream of the obturator with the obturator in the | Passed | Clause 8.3.2 e) Verification of leaktightness upstream of the obturator; Throughout the duration of the test there shall be no leakage or seepage through the walls |
| closed position | Passed | f) Verification of leaktightness of the obturator; Throughout the duration of the test there shall be no leakage of the obturator |
| Leaktightness of the mixing valve downstream of the obturator with the obturator open | Passed | Clause 8.4.3 Throughout the duration of the test there shall be no leakage or seepage through the walls |
| Leaktightness of the obturator: cross flow between hot water and cold water | Passed | Clause 8.7.2 Throughout the duration of the test, there shall be no leakage or seepage at the outlet or at the end of the unconnected inlet. |

(B3) Hydraulic Characteristics

| Sample Reference Characteristics | Sink mixer 515584 | BS EN 817 : 2008 Requirements |
|--|----------------------|--|
| Determination of Flow rate; Test at 3.0 bar dynamic reference pressure | 6.0** | Clause 10.6.3 The flow rate measured at 3.0 bar shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 10 (Refer Appendix) |
| Determination of sensitivity; Supply pressure of 3.0 bar | Passed | Clause 10.7.5 The sensitivity measured shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 11 (Refer Appendix) |

[&]quot;**"Non-compliance with BS EN 817 : 2008 requirements (Please refer to page 28 of 35)

Chur



TEST RESULTS: Cont'd

(C3) Torsion Test

| Sample Reference Characteristics | Sink mixer 515584 | BS EN 817 : 2008 Requirements |
|--|----------------------|---|
| Submitting the operating mechanism to a given torque to verify its strength with no water supplied | Passed | Clause 11.2.5 There shall be no deformation or other deterioration which impairs the function of the mixing valve; the mixing valve shall satisfy the requirement for leaktightness. |

(D3) Mechanical Performance under Pressure Characteristics

| Sample Reference Characteristics | Sink mixer 515584 | BS EN 817 : 2008 Requirements |
|---|----------------------|---|
| Mechanical behaviour upstream of the obturator - Obturator in the close position | Passed | Clause 9.4.2 Throughout the duration of the test, there shall be no permanent deformation of any part of the mixing valve |
| Mechanical behaviour downstream of the obturator - Obturator in the open position | Passed | Clause 9.5.2 There shall be no permanent deformation in any part of the mechanical mixing valve. |

(E3) Mechanical Endurance Characteristics

| Sample Reference Characteristics | Sink mixer 515584 | BS EN 817 : 2008 Requirements |
|------------------------------------|----------------------|--|
| 70,000 cycles of opening & closing | Passed | Clause 12.1.2 During the test, no component fracture, sticking or leakage shall occur. |

(hur



TEST RESULTS:

(A4) Leaktightness Characteristics

| Sample Reference Characteristics | Sink mixer 515585 | BS EN 817 : 2008 Requirements |
|--|----------------------|---|
| Leaktightness of the obturator and of the mixing valve upstream of the obturator with the obturator in the | Passed | Clause 8.3.2 g) Verification of leaktightness upstream of the obturator; Throughout the duration of the test there shall be no leakage or seepage through the walls |
| closed position | Passed | h) Verification of leaktightness of the obturator; Throughout the duration of the test there shall be no leakage of the obturator |
| Leaktightness of the mixing valve downstream of the obturator with the obturator open | Passed | Clause 8.4.3 Throughout the duration of the test there shall be no leakage or seepage through the walls |
| Leaktightness of the obturator: cross flow between hot water and cold water | Passed | Clause 8.7.2 Throughout the duration of the test, there shall be no leakage or seepage at the outlet or at the end of the unconnected inlet. |

(B4) Hydraulic Characteristics

| Sample Reference Characteristics | Sink mixer 515585 | BS EN 817 : 2008 Requirements |
|--|----------------------|---|
| Determination of Flow rate; Test at 3.0 bar dynamic reference pressure | 5.5** | Clause 10.6.3 The flow rate measured at 3.0 bar shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 10 (Refer Appendix) |
| Determination of sensitivity; Supply pressure of 3.0 bar | Passed | Clause 10.7.5 The sensitivity measured shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 11 (Refer Appendix) |

[&]quot;**"Non-compliance with BS EN 817 : 2008 requirements (Please refer to page 28 of 35)

Chur



TEST RESULTS: Cont'd

(C4) Torsion Test

| Sample Reference Characteristics | Sink mixer 515585 | BS EN 817 : 2008 Requirements |
|--|----------------------|--|
| Submitting the operating mechanism to a given torque to verify its strength with no water supplied | Passed | Clause 11.2.5 There shall be no deformation or other deterioration which impairs the function of the mixing valve, the mixing valve shall satisfy the requirement for leaktightness. |

(D4) Mechanical Performance under Pressure Characteristics

| Sample Reference Characteristics | Sink mixer 515585 | BS EN 817 : 2008 Requirements |
|---|----------------------|---|
| Mechanical behaviour upstream of the obturator - Obturator in the close position | Passed | Clause 9.4.2 Throughout the duration of the test, there shall be no permanent deformation of any part of the mixing valve |
| Mechanical behaviour downstream of the obturator - Obturator in the open position | Passed | Clause 9.5.2 There shall be no permanent deformation in any part of the mechanical mixing valve. |

(E4)Mechanical Endurance Test of Swivel spout

| Sample Reference Characteristics | Sink mixer 515585 | BS EN 817 : 2008 Requirements |
|----------------------------------|----------------------|---|
| Number of cycles : 80,000 | Passed | Clause 12.3.4 During the test, there shall be no deformation, fracture of the swivel nozzle or the device connecting it to the body or any leakage of the assembly |

(hr



TEST RESULTS:

(A5) Leaktightness Characteristics

| Sample Reference Characteristics | Sink mixer 512322,512324 514019,512402 | BS EN 817 : 2008 Requirements |
|---|--|--|
| Leaktightness of the obturator and of the mixing valve upstream of the | Passed | Clause 8.3.2 i) Verification of leaktightness upstream of the obturator; Throughout the duration of the test there shall be no leakage or |
| obturator with the obturator in the closed position | Passed | j) Verification of leaktightness of the obturator; Throughout the duration of the test there shall be no leakage of the obturator |
| Leaktightness of the mixing valve downstream of the obturator with the obturator open | Passed | Clause 8.4.3 Throughout the duration of the test there shall be no leakage or seepage through the walls |
| Leaktightness of the obturator: cross flow between hot water and cold water | Passed | Clause 8.7.2 Throughout the duration of the test, there shall be no leakage or seepage at the outlet or at the end of the unconnected inlet. |

(B5) Hydraulic Characteristics

| Sample Reference Characteristics | Sink | mixer | BS EN 817 : 2008 Requirements |
|--|--------|-------|---|
| | 512322 | 4.3** | Clause 10.6.3 |
| Determination of Flow rate; Test at | 512324 | 4.3** | The flow rate measured at 3.0 bar shall, depending on the type of appliance for |
| 3.0 bar dynamic reference pressure | 514019 | 4.3** | which the mixing valve is intended, be as specified in Table 10 (Refer |
| | 512402 | 4.3** | Appendix) |
| Determination of sensitivity; Supply pressure of 3.0 bar | Pas | sed | Clause 10.7.5 The sensitivity measured shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 11 (Refer Appendix) |

[&]quot;**"Non-compliance with BS EN 817 : 2008 requirements (Please refer to page 28 of 35)

M aldehy.



TEST RESULTS: Cont'd

(C5) Torsion Test

| Sample Reference Characteristics | Sink mixer 512322,512324 514019,512402 | BS EN 817 : 2008 Requirements |
|--|--|--|
| Submitting the operating mechanism to a given torque to verify its strength with no water supplied | Passed | Clause 11.2.5 There shall be no deformation or other deterioration which impairs the function of the mixing valve; the mixing valve shall satisfy the requirement for leaktightness. |

(D5) Mechanical Performance under Pressure Characteristics

| Sample Reference Characteristics | Sink mixer 512322,512324 514019,512402 | BS EN 817 : 2008 Requirements |
|---|---|---|
| Mechanical behaviour upstream of the obturator - Obturator in the close position | Passed | Clause 9.4.2 Throughout the duration of the test, there shall be no permanent deformation of any part of the mixing valve |
| Mechanical behaviour downstream of the obturator - Obturator in the open position | Passed | Clause 9.5.2 There shall be no permanent deformation in any part of the mechanical mixing valve. |

Chur

alkhy.



TEST RESULTS:

(A6) Leaktightness Characteristics

| Sample Reference Characteristics | Sink mixer 514209,516526 516671,515987 513549 | BS EN 817 : 2008 Requirements |
|---|--|---|
| Leaktightness of the obturator and of the mixing valve upstream of the | Passed | Clause 8.3.2 k) Verification of leaktightness upstream of the obturator; Throughout the duration of the test there shall be no leakage or seepage through the walls |
| obturator with the obturator in the closed position | Passed | Verification of leaktightness of the obturator; Throughout the duration of the test there shall be no leakage of the obturator |
| Leaktightness of the mixing valve downstream of the obturator with the obturator open | Passed | Clause 8.4.3 Throughout the duration of the test there shall be no leakage or seepage through the walls |
| Leaktightness of the obturator: cross flow between hot water and cold water | Passed | Clause 8.7.2 Throughout the duration of the test, there shall be no leakage or seepage at the outlet or at the end of the unconnected inlet. |

(B6) Hydraulic Characteristics

| Sample Reference Characteristics | Sink | mixer | BS EN 817 : 2008 Requirements | |
|--|--------|-------|---|--|
| | 514209 | 4.4** | Clause 10.6.3 | |
| B | 516526 | 4.3** | The flow rate measured at 3.0 bar shall, | |
| Determination of Flow rate; Test at 3.0 bar dynamic reference pressure | 516671 | 4.3** | depending on the type of appliance for which the mixing valve is intended, be | |
| o.o bai dynamic reference pressure | 515987 | 6.2** | as specified in Table 10 (Refer | |
| | 513549 | 4.4** | Appendix) | |
| Determination of sensitivity; Supply pressure of 3.0 bar | Pas | sed | Clause 10.7.5 The sensitivity measured shall, depending on the type of appliance for which the mixing valve is intended, be as specified in Table 11 (Refer Appendix) | |

[&]quot;**"Non-compliance with BS EN 817 : 2008 requirements (Please refer to page 28 of 35)

Chur

aldhy.



TEST RESULTS: Cont'd

(C6) Torsion Test

| Sample Reference Characteristics | Sink mixer 514209,516526 516671,515987 513549 | BS EN 817 : 2008 Requirements |
|--|--|--|
| Submitting the operating mechanism to a given torque to verify its strength with no water supplied | Passed | Clause 11.2.5 There shall be no deformation or other deterioration which impairs the function of the mixing valve; the mixing valve shall satisfy the requirement for leaktightness. |

(D6) Mechanical Performance under Pressure Characteristics

| Sample Reference Characteristics | Sink mixer 514209,516526 516671,515987 513549 | BS EN 817 : 2008 Requirements |
|---|--|---|
| Mechanical behaviour upstream of the obturator - Obturator in the close position | Passed | Clause 9.4.2 Throughout the duration of the test, there shall be no permanent deformation of any part of the mixing valve |
| Mechanical behaviour downstream of the obturator - Obturator in the open position | Passed | Clause 9.5.2 There shall be no permanent deformation in any part of the mechanical mixing valve. |

Chur

allochy.



REMARKS:

| S/N | Type of tap fittings | Model | BS EN 817 : 2008 Requirements | Characteristics |
|-----|----------------------|--------|----------------------------------|---|
| 1. | Sink Mixer | 512322 | Complied | 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 |
| 2. | Sink mixer | 512324 | Complied | |
| 3. | Sink Mixer | 514019 | Complied | |
| 4. | Sink Mixer | 512402 | Complied | |
| 5. | Sink Mixer | 514209 | Complied | A) Leaktightness Characteristics |
| 6. | Sink Mixer | 512580 | Complied | C) Torsion test D) Mechanical performance under pressure Characteristics |
| 7. | Sink Mixer | 515584 | Complied | |
| 8. | Sink Mixer | 515585 | Complied | |
| 9. | Sink Mixer | 516526 | Complied | E) Mechanical Endurance |
| 10. | Sink Mixer | 516671 | Complied | 2) |
| 11. | Sink Mixer | 516672 | Complied | |
| 12. | Sink Mixer | 515987 | Complied | |
| 13. | Sink Mixer | 513649 | Complied | |

a. The test samples complied with BS EN 817 : 2008 requirements except hydraulic characteristics which complied with SS CP 48 : 2005 requirements.

Chua Lee Choong Associate Engineer Chua Peck Cheong Product Manager

Automotive & Industrial Group

Mechanical Centre



APPENDIX:

Table 10- Flow rates according to application

| Application of mixing valve | Requirement |
|-----------------------------|---|
| With water saving: | |
| Basin, bidet, sink | (4.0 to 9.0) I/min [(0.066 to 0.15) I/s] |
| Without water saving: | |
| Basin, Bidet, sink, shower | Min 12.0 l/m (0.2 l/s) ^a |
| Bath | Min 19.0 l/min (0.316 l/s) (Full cold or full hot position) |
| Dalii | Min 20.0 l/min (0.33 l/s) in the range of (34°C to 44°C) |

^{*}Table as per BS EN 817 : 2008

Table 11- Performance levels

| Actuation of the mixing valve ^b | Basin, sink, bidet ^a | Shower, bath/shower at shower outlet only |
|--|---------------------------------|---|
| Control devices with r>45mm | Min 10mm | Min 12 mm |
| Control deviceswith r≤45mm | Min 10° angular or min 10 mm | Min 12° angular or min 12 mm |

blincluding sequential mixing valve, joystick or any new technology *Table as per BS EN 817 : 2008

Chur

alkhy.



APPENDIX: Cont'd



Photo 1. Sink Mixer Model: 512322



Photo 2. Sink Mixer Model: 512324



Photo 3. Sink Mixer Model: 514019



Photo 4. Sink Mixer Model: 512402

Chur



APPENDIX: Cont'd




Photo 5. Sink Mixer Model: 514209



Photo 6 : Sink Mixer Model: 512580



Photo 7 : Sink Mixer Model: 515584



Photo 8 : Sink Mixer Model: 515585

Chur

aldehny.



APPENDIX: Cont'd



Photo 9 : Sink Mixer Model: 516526



Photo 10 : Sink Mixer Model: 516671



Photo 11 : Sink Mixer Model: 516672



Photo 12 : Sink Mixer Model: 515987



Photo 13 : Sink Mixer Model: 513549

(Jur



Test Results Summary (Ref: 719182235-MEC10-CLC)

Test Standard : BS EN 817-2008 BS EN 248-2002 AS/NZS-3009 SC375 - 2004

| Droding | Disclind Tools | 46.2002, AS/NZS:402 | 7555, 5002, 5537 | 1,007; c | | | | | |
|----------------------|------------------------------|--------------------------------------|---------------------------------------|----------------|----------------|--|-------------------|-------------------|------------|
| 10000 | 576D | Leaktightness, Torsion Resistance | Hydraulic | | Endurance | | Effect on | Metal | |
| | | & Mechanical Performance | a a a a a a a a a a a a a a a a a a a | Headwork | Swivel | Diverter | Water | Toxicity | Salt Spray |
| Model | Instructions | | | | | | | | |
| Sink mixer 516672 | If done, Pass/Fail | Pass | Pass* | Pass 516672 | Pass 512580 | N.A. | Pass¹ | Pass ² | Pass³ |
| 512322 512324 | If not done, reference | - | ı | ı | 1 | l de la companya de l | Γ | 1 | 1 |
| 514019 512402 | If not done, no reference | ı | • | | 1 | 1 | ı | ı | |
| Sink mixer | If done, Pass/Fail | Pass | Pass* | Pass 515584 | Pass 515585 | N.A. | Pass ¹ | Pass ² | Pass³ |
| 515584 | If not done, reference | - | | 1 | 1 | ı | I | 1 | 1 |
| 515585 | If not done, no reference | | | - | 1 | I | ļ | | 1 |

**"The test sample complied with BS EN 817 : 2008 requirements except hydraulic characteristics which complied with SS CP 48 : 2005 requirements.

"1" Effect on Water Reference: 719182235-CHM-A&B-LYP dated 17/Aug/2010 "2" Metal Toxicity Reference: 719182235-MEC10-EO dated 21/Aug/2010 "3" Salt Spray Reference: 719182235-CHM10-02-PGK(MEC) dated 29 Sep 2010





Test Results Summary (Ref: 719182235-MEC10-CLC)

Test Standard: BS EN 817:2008, BS EN 248:2002. AS/NZS:4020:2005. SS375 -2001

| | | יסובסבי וסרו | 0.5000, 0001. | 1002. | | | | | |
|----------------------------|------------------------------|--------------------------------------|---------------|----------------|----------------|----------|-------------------|-------------------|------------|
| Product, | Tests | | | | | | | | |
| | | Leaktightness, Torsion Resistance | Hydraulic | | Endurance | | Effect on | Metal | |
| Model | Instructions | & Mechanical Performance | | Headwork | Swivel | Diverter | Water | Toxicity | Salt Spray |
| Sink mixer | If done, Pass/Fail | Pass | Pass* | ı | | N.A. | Pass ¹ | Pass ² | Pass³ |
| 514209 516526 516671 | If not done, reference | , | | Pass 516672 | Pass 512580 | | ı | 1 | 1 |
| 515987 513549 | If not done, no reference | 1 | 1 | 1 | ı | - | 1 | 1 | 1 |

^{**&}quot;The test sample complied with BS EN 817 : 2008 requirements except hydraulic characteristics which complied with SS CP 48 : 2005 requirements.



[&]quot;1" Effect on Water Reference: 719182235-CHM-A&B-LYP dated 17/Aug/2010"2" Metal Toxicity Reference: 719182235-MEC10-EO dated 21/Aug/2010"3" Salt Spray Reference: 719182235-CHM10-02-PGK(MEC) dated 29 Sep 2010



This Report is issued under the following conditions:

- 1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
- Unless otherwise requested, this report shall contain only technical results carried out by TÜV SÜD PSB. Analysis and interpretation of the
 results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for,
 by the Client.
- 3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
- 4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
- 5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through TÜV SÜD PSB, unless the Client has authorised TÜV SÜD PSB in writing to do so.
- 6. TÜV SÜD PSB may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such additions or amendments shall be binding on the Client.
- 7. All copyright in the report shall remain with TÜV SÜD PSB and the Client shall, upon payment of TÜV SÜD PSB's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that TÜV SÜD PSB may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
- 8. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
- 9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
- 10. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

March 2010