BLANCO

BLANCO LINUS-S

≤ 70 °C
≤ 158 °F

Max Static Pressure: 1000 kPa, **Min Pressure:** 150 kPa
Recommended Dynamic Pressure: 300 kPa
This installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS 3718.

1

BLANCO LINUS-S

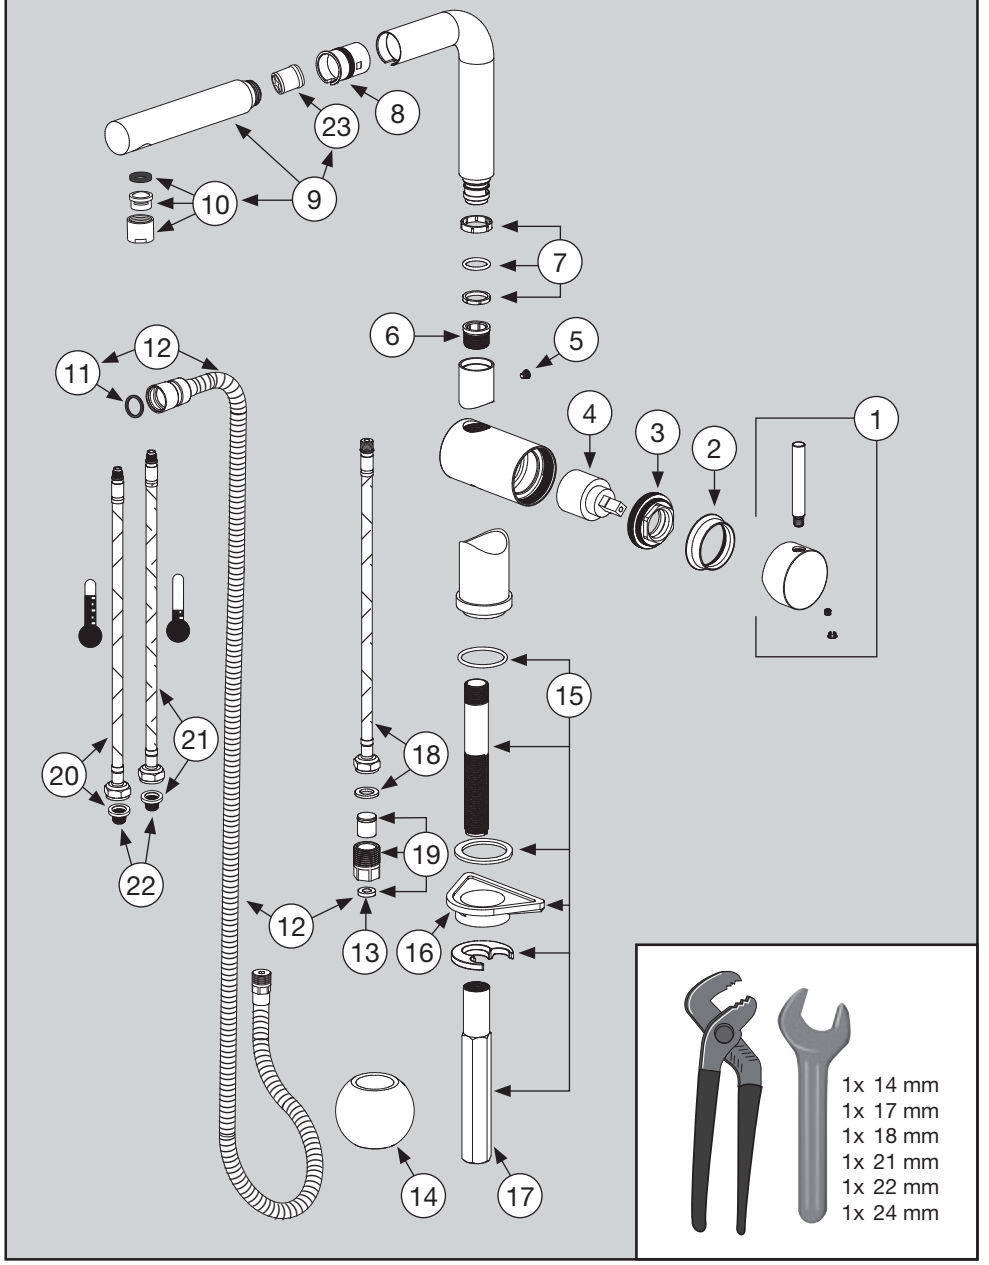

1x 14 mm
1x 17 mm
1x 18 mm
1x 21 mm
1x 22 mm
1x 24 mm

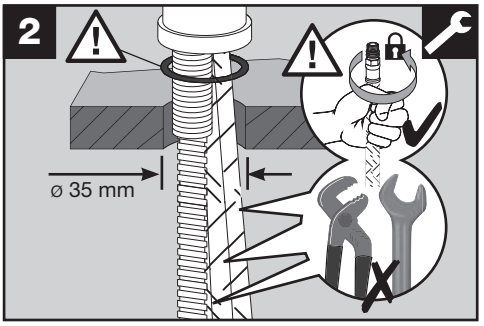
2
ø 35 mm

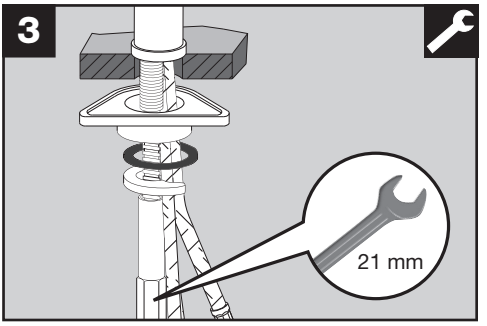
3
21 mm

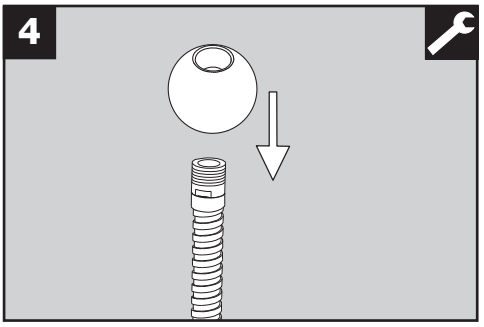
4

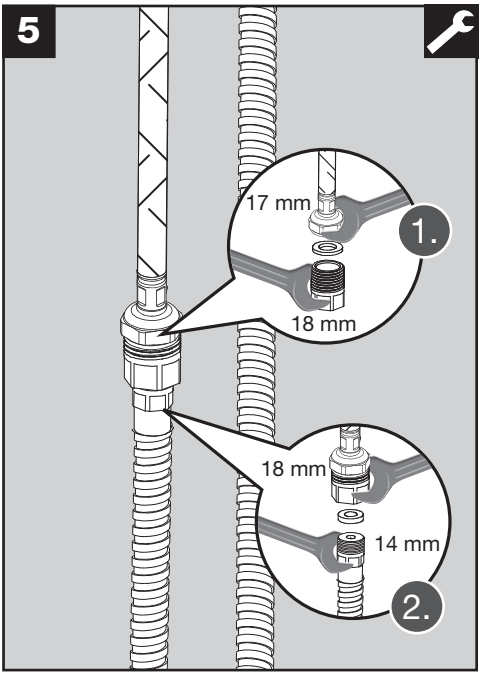
5
17 mm
1.
18 mm
18 mm
14 mm
2.

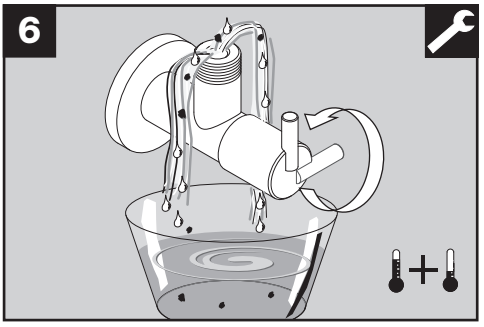
6

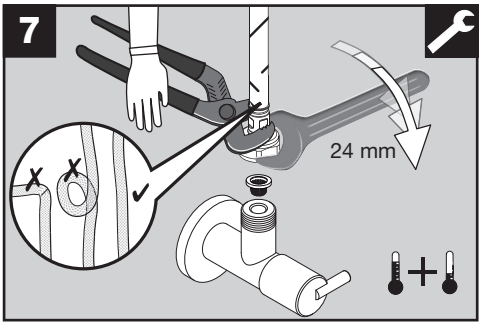
7
24 mm

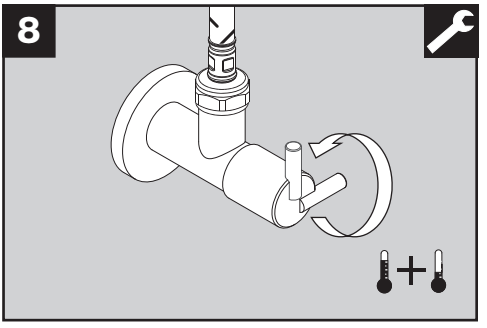
8

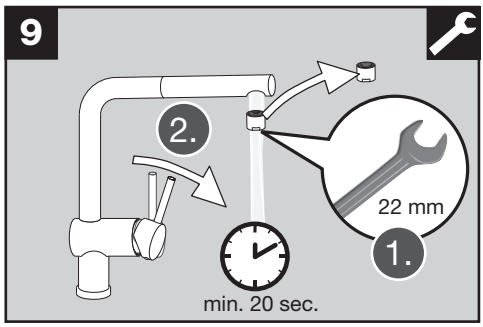

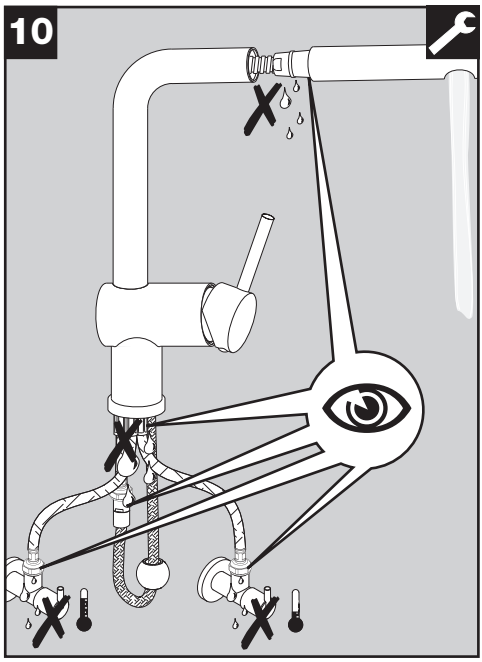

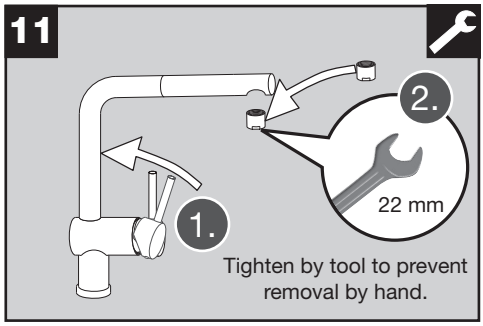

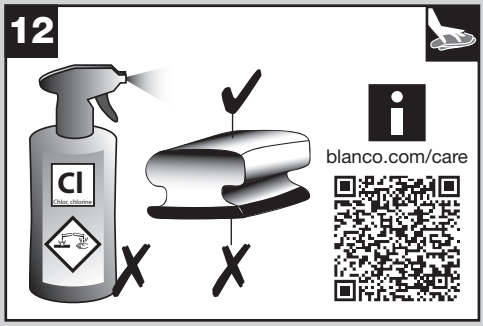

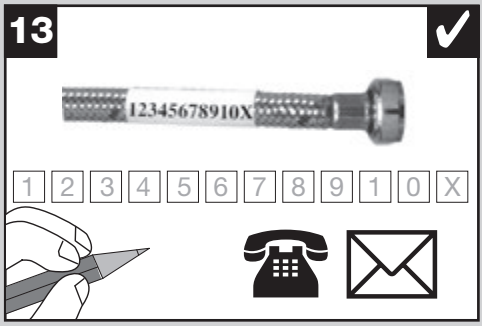

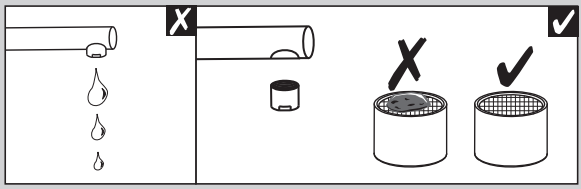



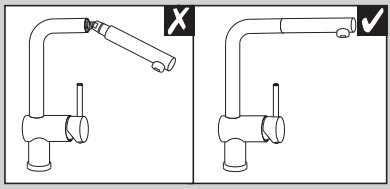

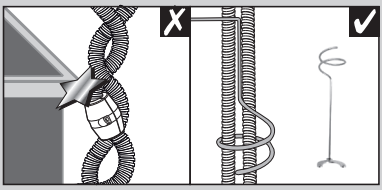

121 108 | Rev22 | 2025-03-11 | v12

BLANCO

BLANCO AUSTRALIA PTY LTD · Service AU · Phone: +61 75 5960 894
blanco@t2services.com.au

铂浪高贸易（上海）有限公司 **中国服**务商 电话：86-21-58355662/400-788-2100
info-blancochina@blanco.de · www.blanco.com.cn