



# BLANCO


## BLANCO LINUS-F ND




✓  
≤ 70°C  
≤ 158°F




✓  
≤ 10 bar  
≤ 145 psi



✓




✓




✓








# BLANCO LINUS-F ND








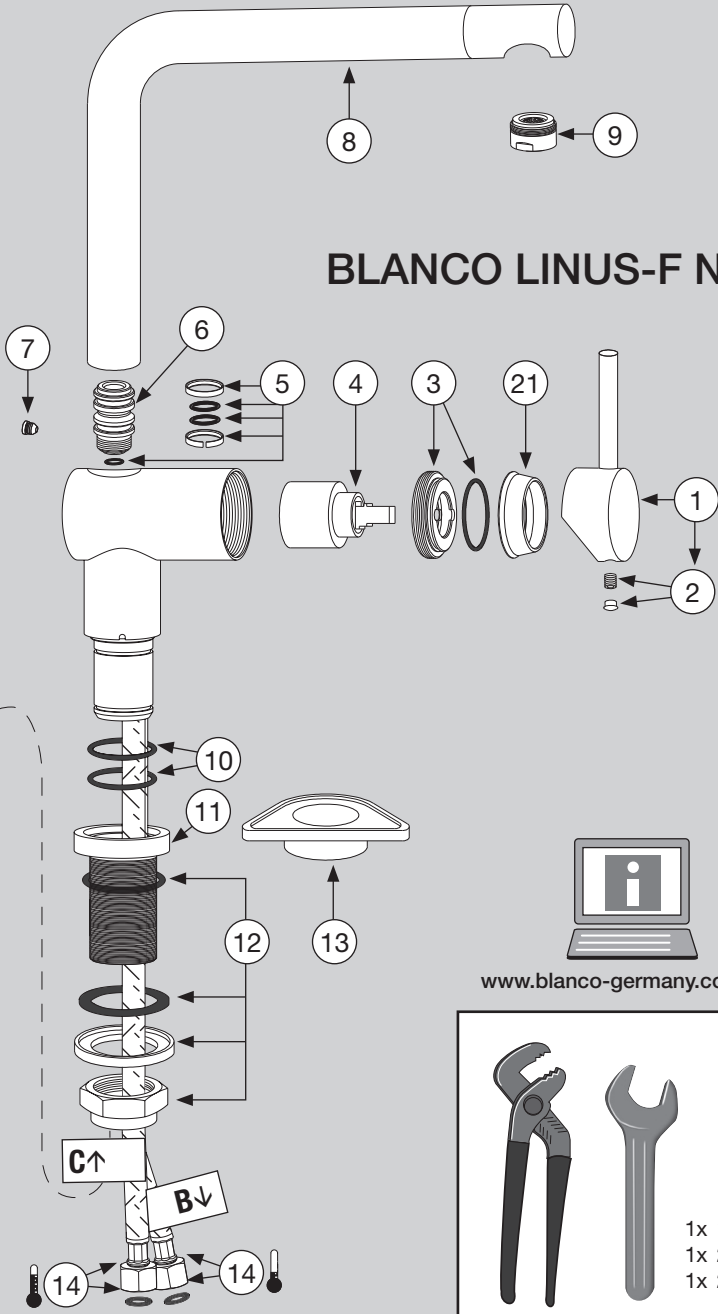


[www.blanco-germany.com/sos](http://www.blanco-germany.com/sos)



1x 19 mm  
1x 21 mm  
1x 22 mm

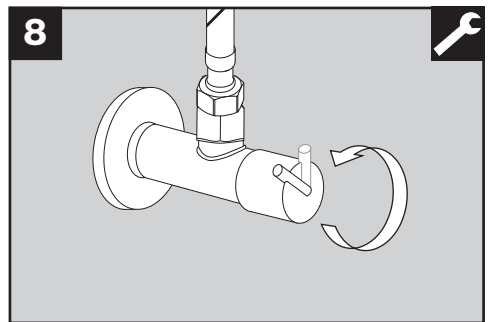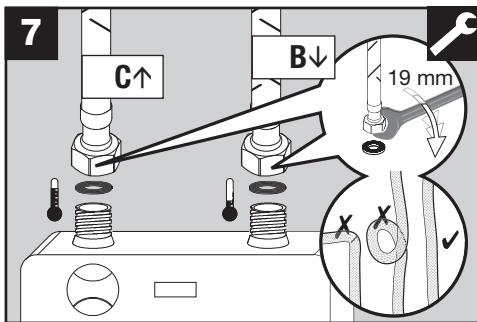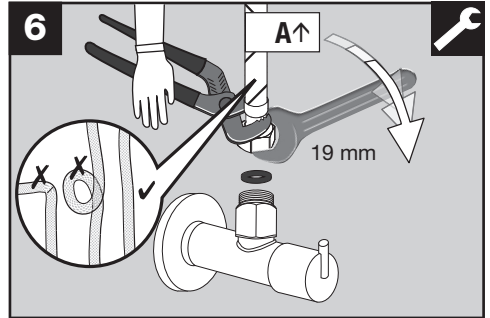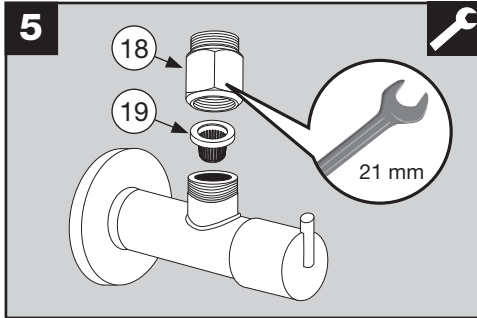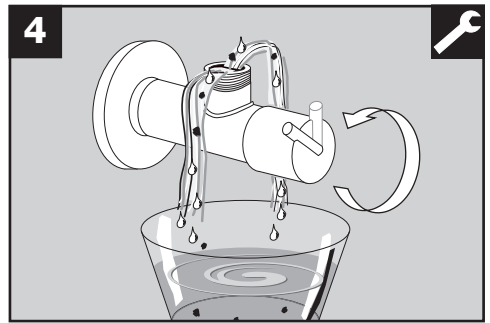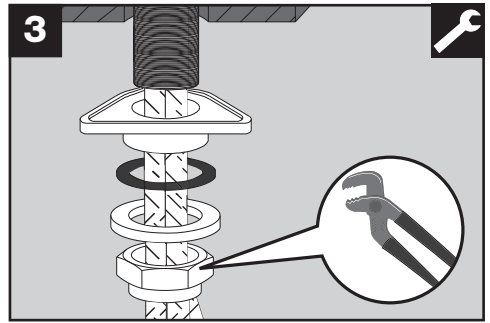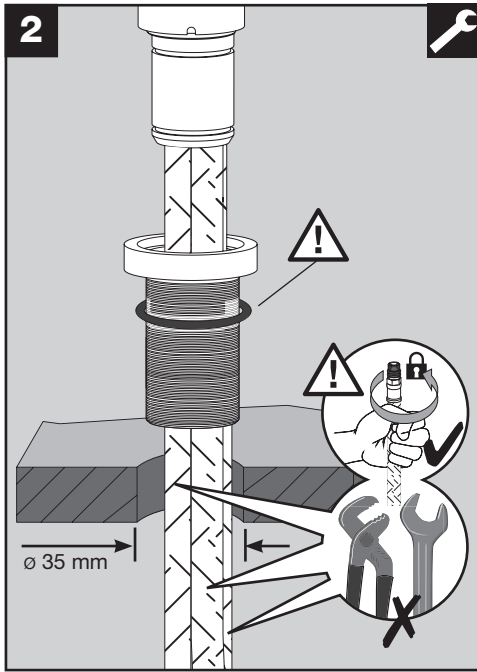

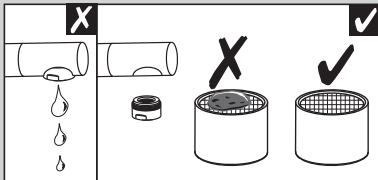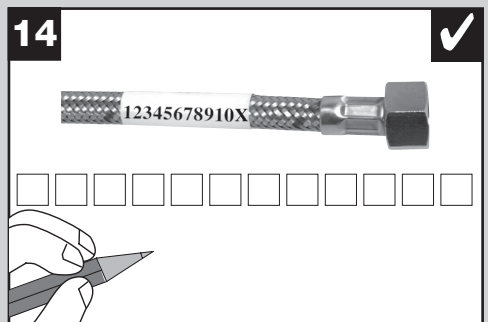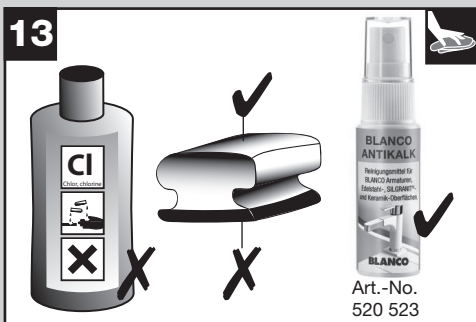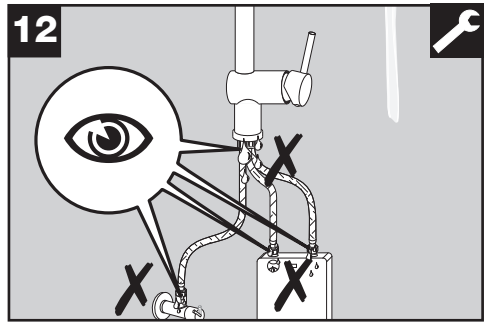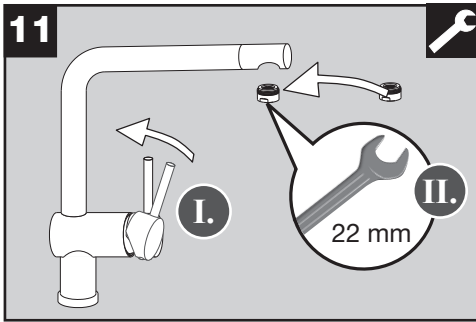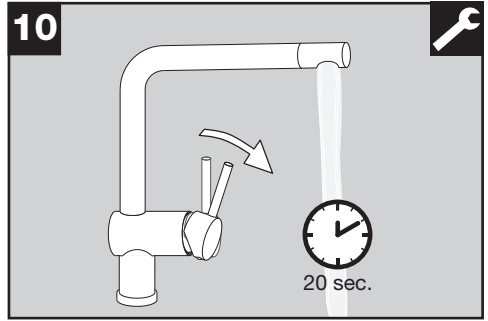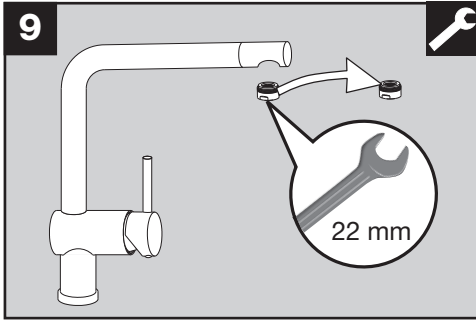

# BLANCO

BLANCO GmbH + Co KG  
Service  
Tel.: +49 7045 44-81 419  
info@blanco-germany.com  
www.blanco-germany.com