


BLANCO


BLANCO ALTA-S II


















≤ 70°C
≤ 158°F

Max Static Pressure: 1000 kPa, **Min Pressure:** 150 kPa
Recommended Dynamic Pressure: 300 kPa

This installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS 3718.

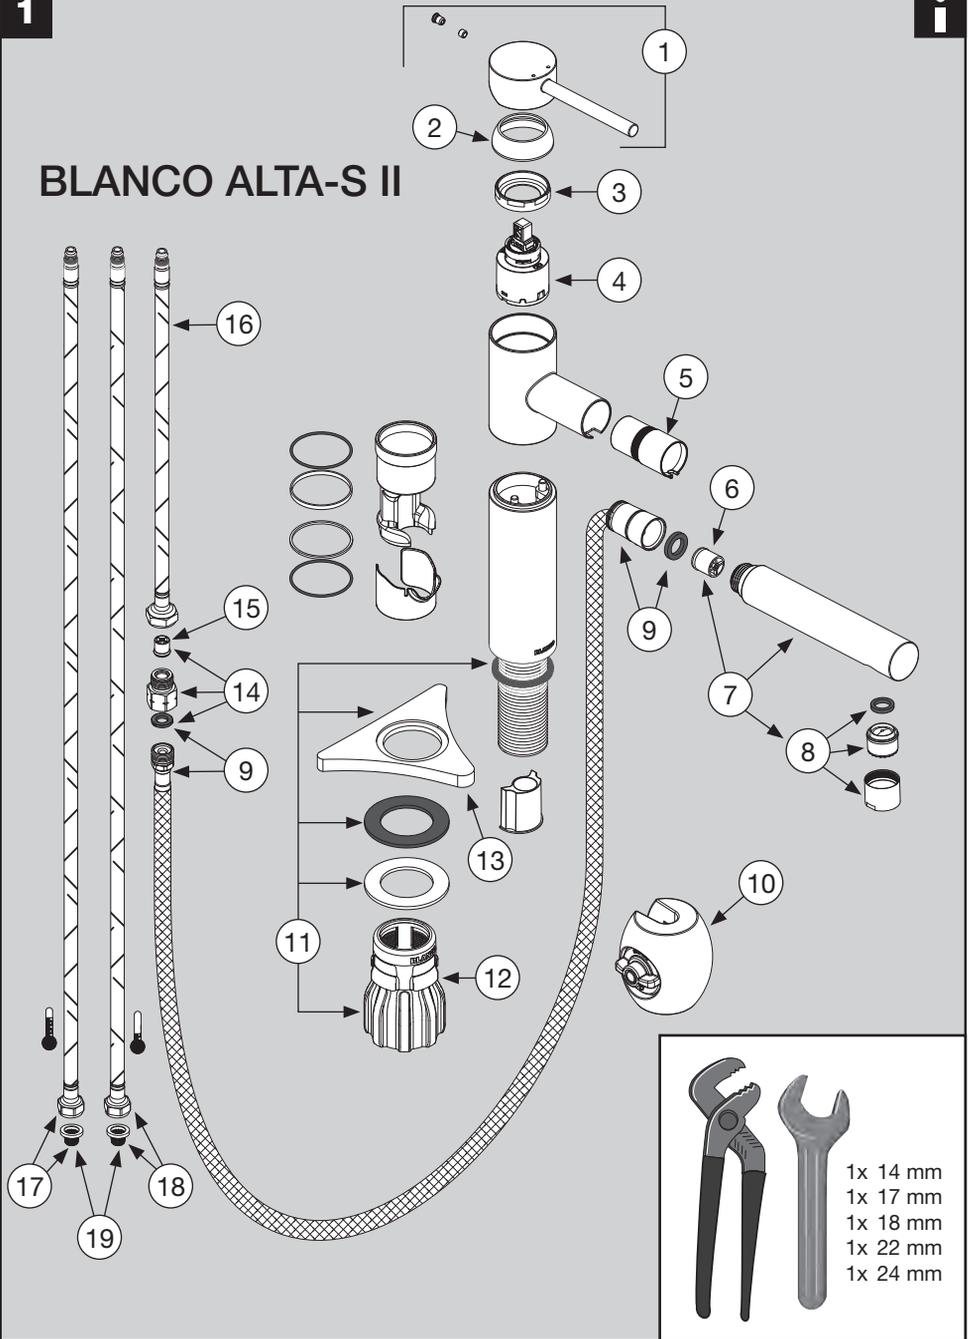1**i****BLANCO ALTA-S II**

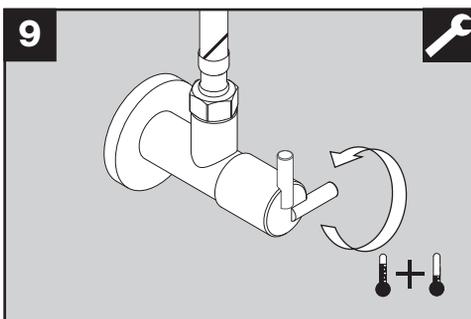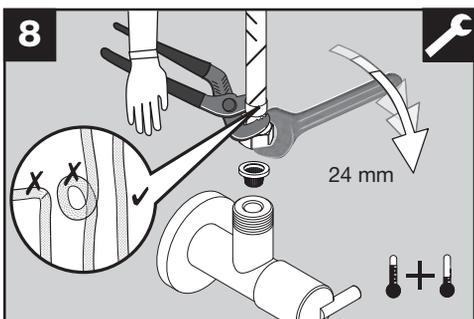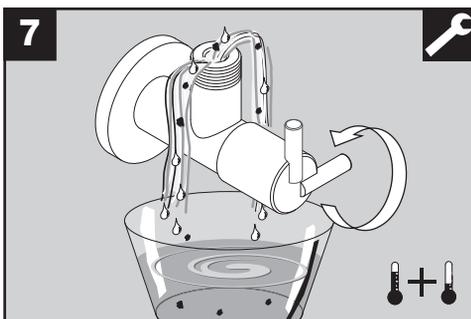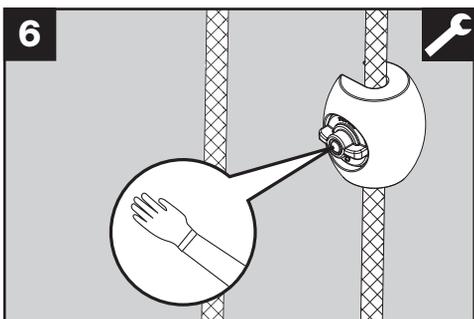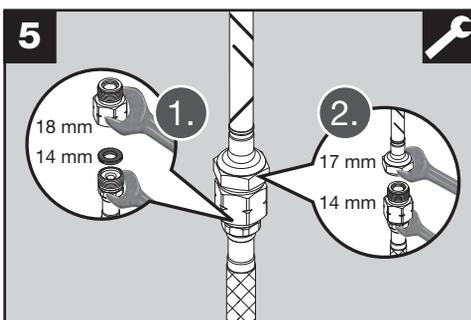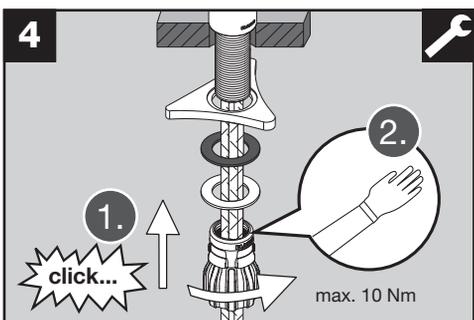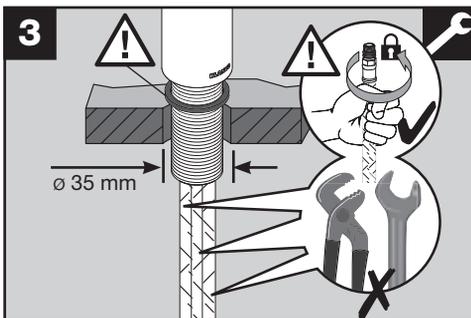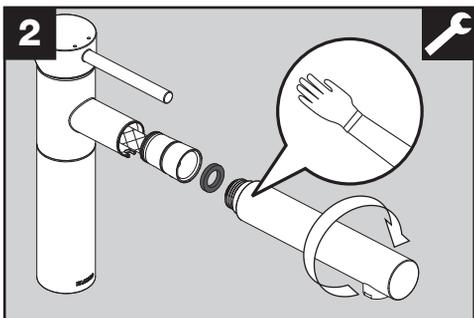

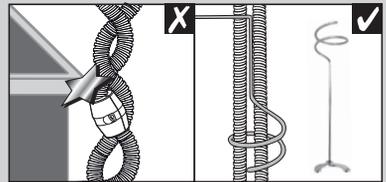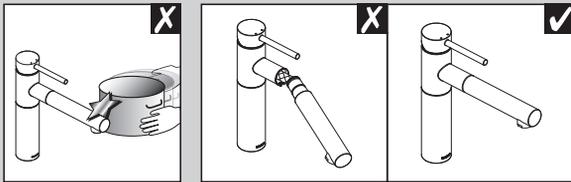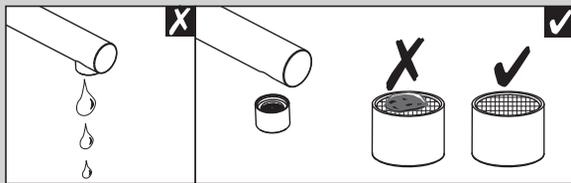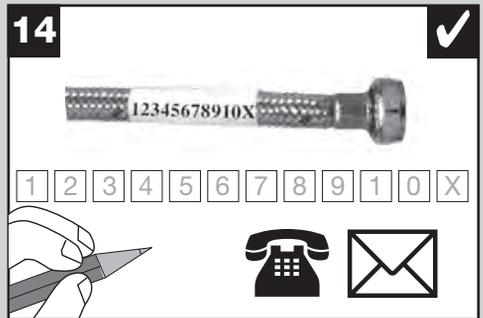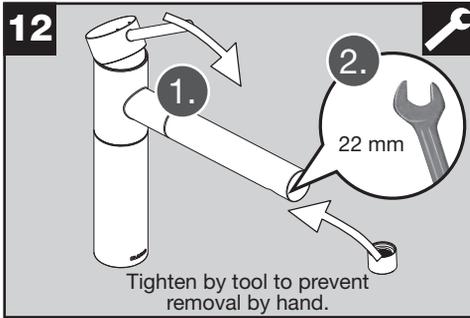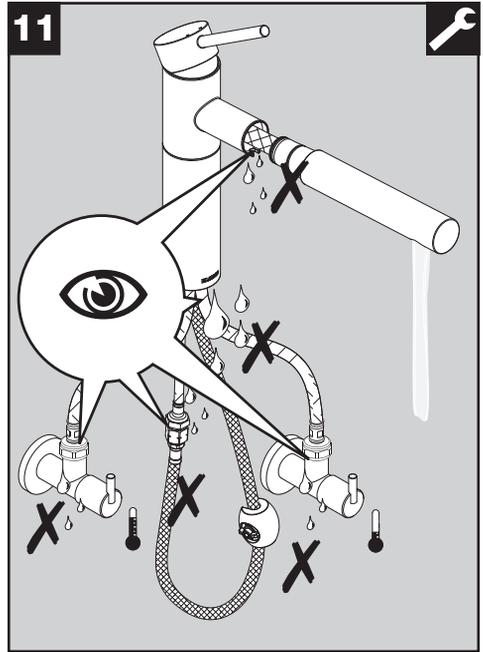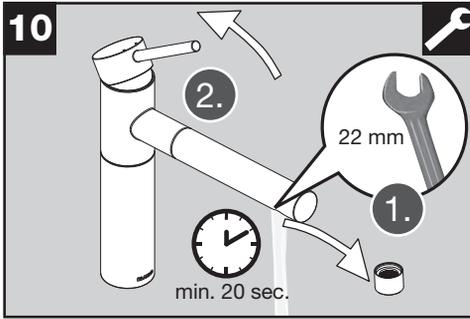

BLANCO

BLANCO AUSTRALIA PTY LTD · Service AU · Phone: +61 75 5960 894
 blanco@t2services.com.au

铂浪高贸易(上海)有限公司 中国服务商 电话: 86-21-58355662/400-788-2100
 info-blancochina@blanco.de · www.blanco.com.cn