

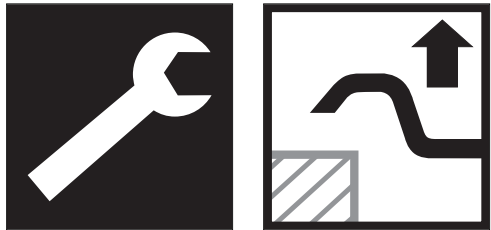
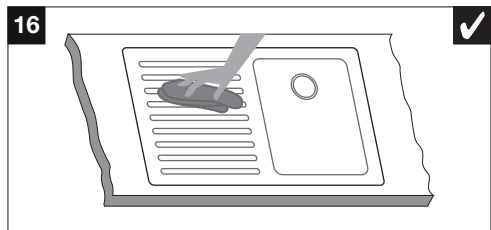
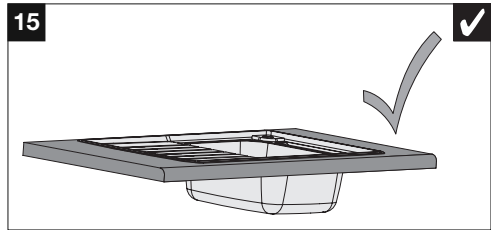
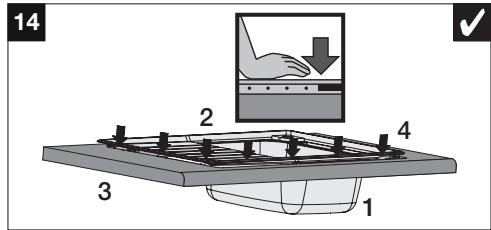
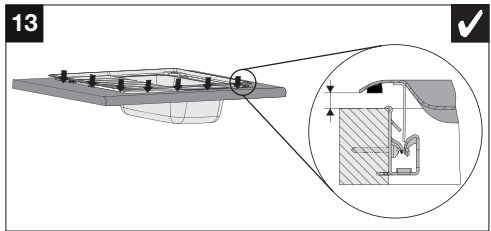
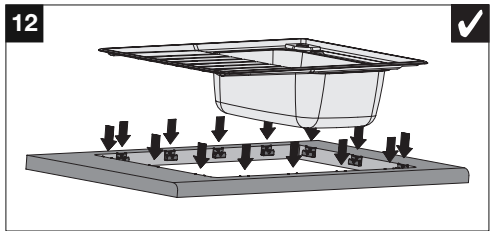
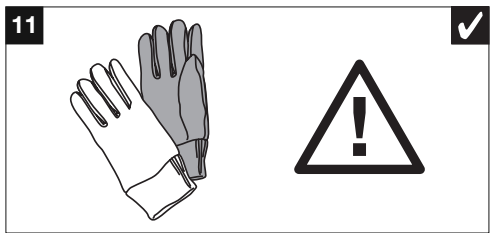
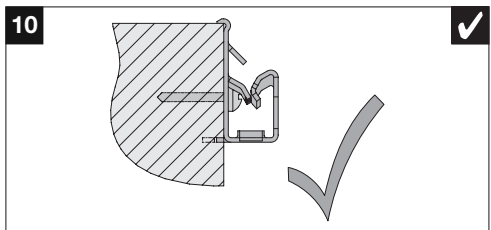
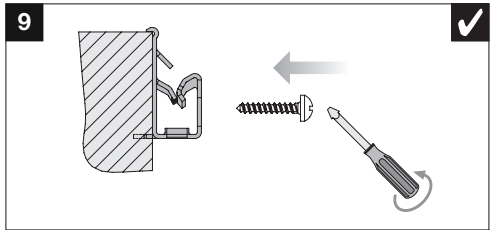
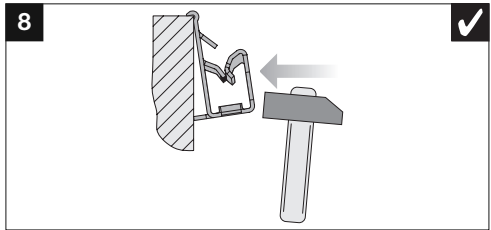
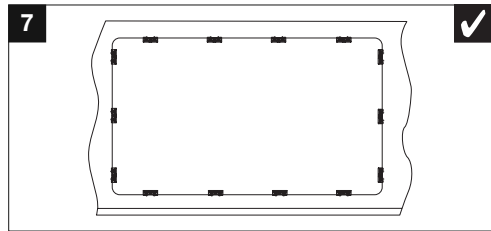
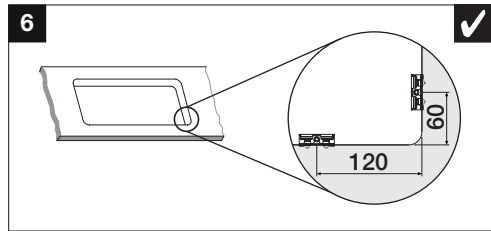
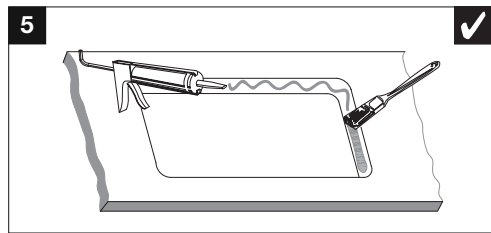
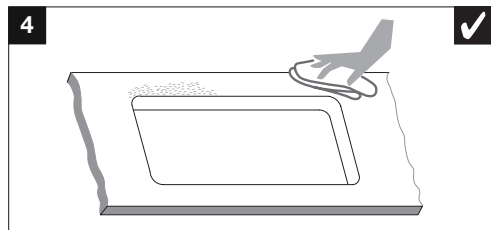
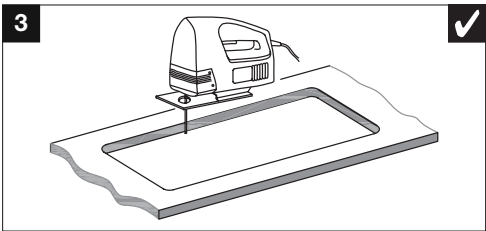
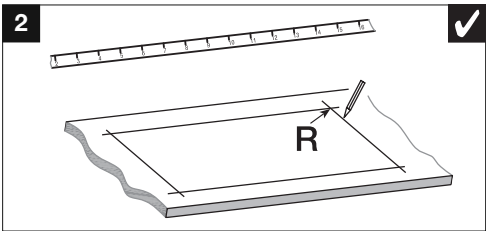
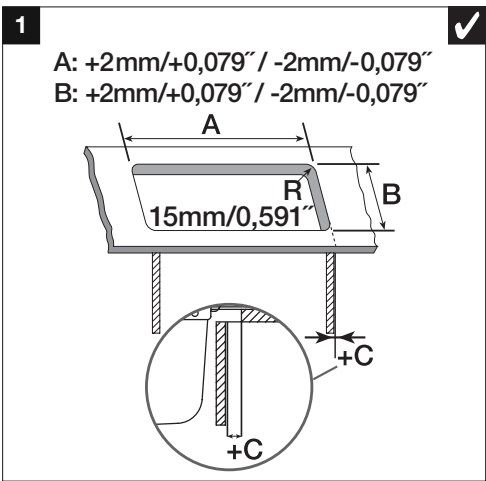








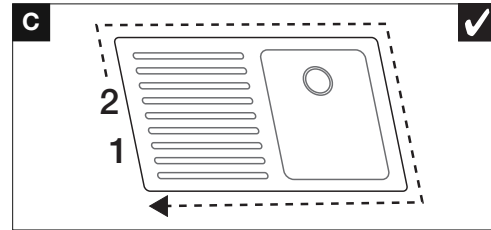


✓ OK
✗ not OK





	+2 mm/+0,079" / -2 mm/-0,079"					
	A (mm / inch)		B (mm / inch)		C (mm / inch)	
BLANCOAXIS 45S PuraPlus® Steel IMPRESS™	837 mm	32,952"	487 mm	19,173"	8,5 mm	0,335"
BLANCOAXIS 5S PuraPlus® Steel IMPRESS™	892 mm	35,118"	487 mm	19,173"	15 mm	0,591"
BLANCOAXIS 6S PuraPlus® Steel IMPRESS™	977 mm	38,464"	487 mm	19,173"	6,5 mm	0,256"

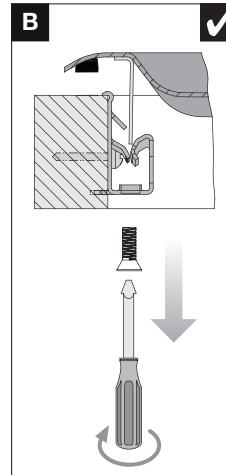

✓ OK
✗ not OK








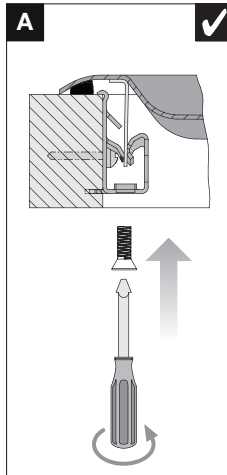


✓ OK
✗ not OK






✓ OK
✗ not OK



BLANCO
BLANCO GmbH + Co KG
Technischer Kundendienst
Tel.: +49 7045 44-81 419
info@blanco.de · www.blanco.com



BLANCO IMPRESS™



PuraPlus® Steel



222 272 08/2007