

# BLANCO

## BLANCOWEGA-S II



≤ 70 °C  
≤ 158 °F


A thermometer icon with a checkmark in the top right corner.

**Max Static Pressure:** 1000 kPa, **Min Pressure:** 150 kPa

**Recommended Dynamic Pressure:** 300 kPa

This installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS 3718.

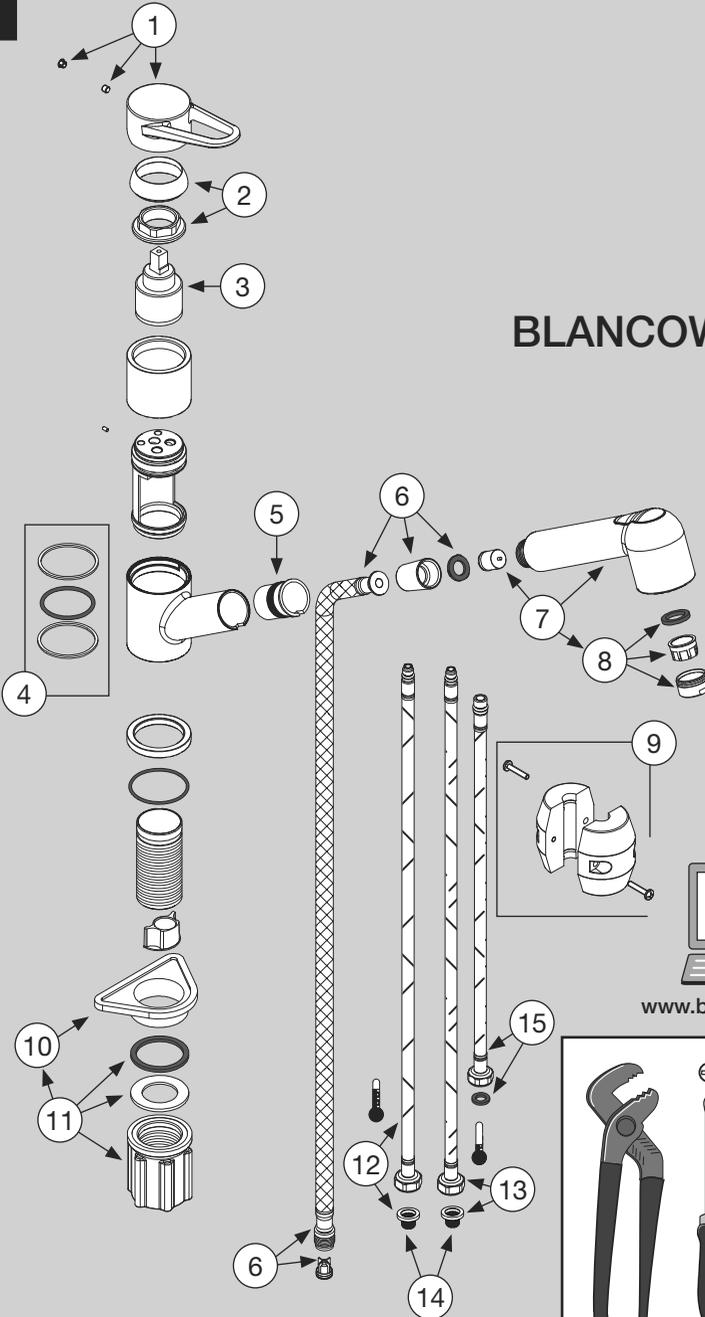








**1**









# BLANCOWEGA-S II

[www.blanco.com/sos](http://www.blanco.com/sos)

Tools required for installation:

- 1x PH 2 screwdriver
- 1x 14 mm wrench
- 1x 17 mm wrench
- 1x 22 mm wrench
- 1x 23 mm wrench

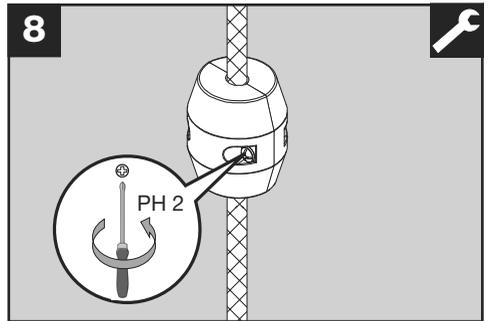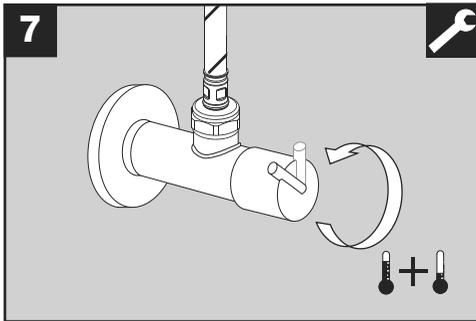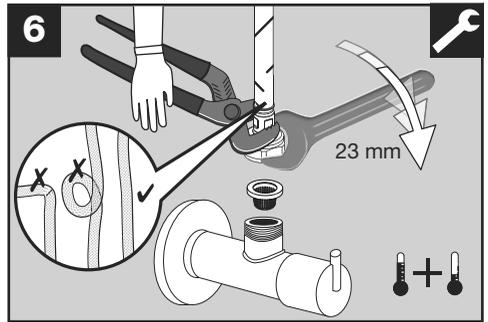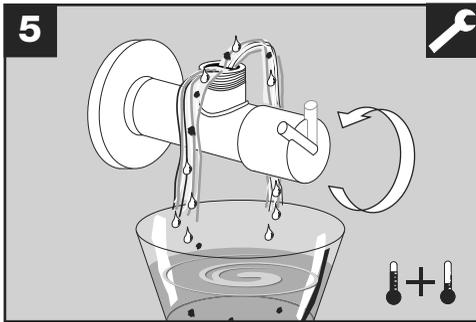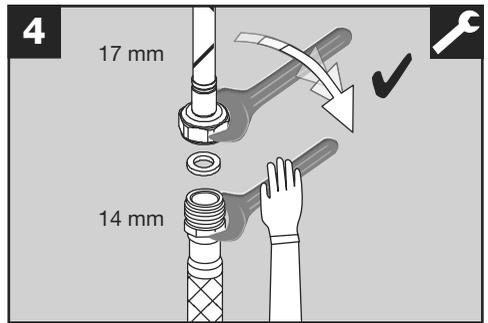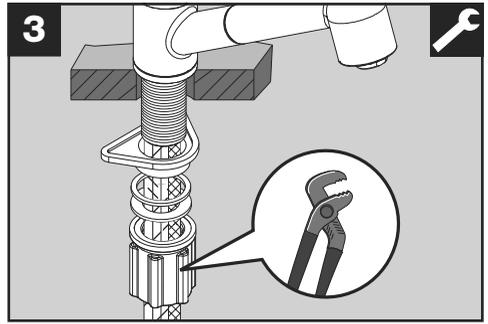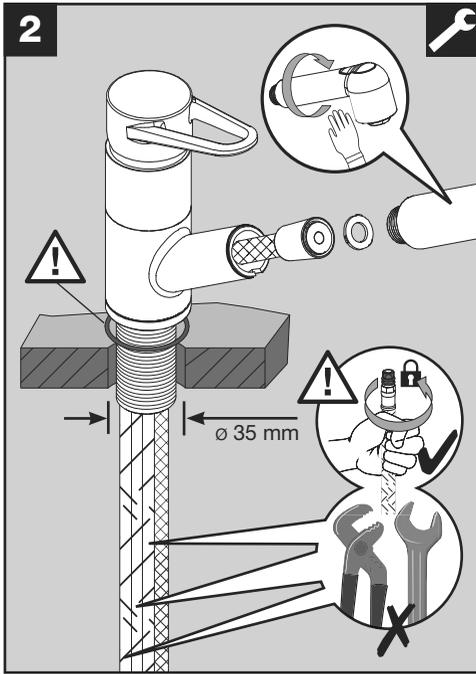

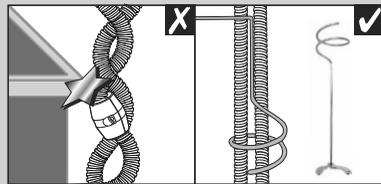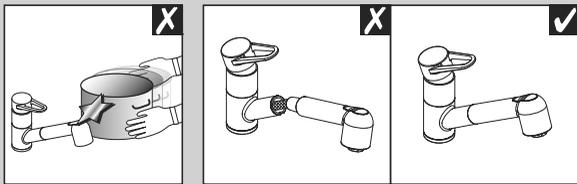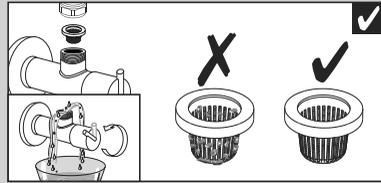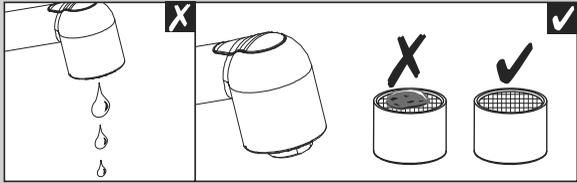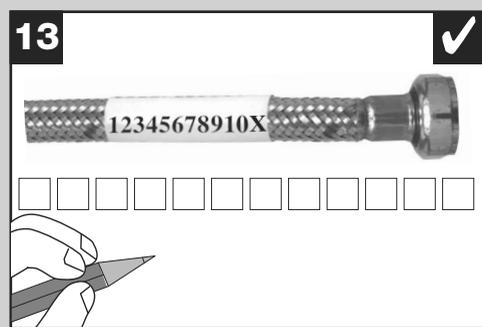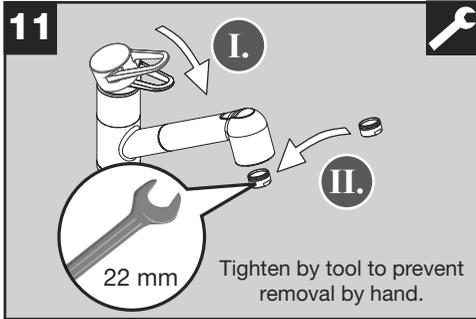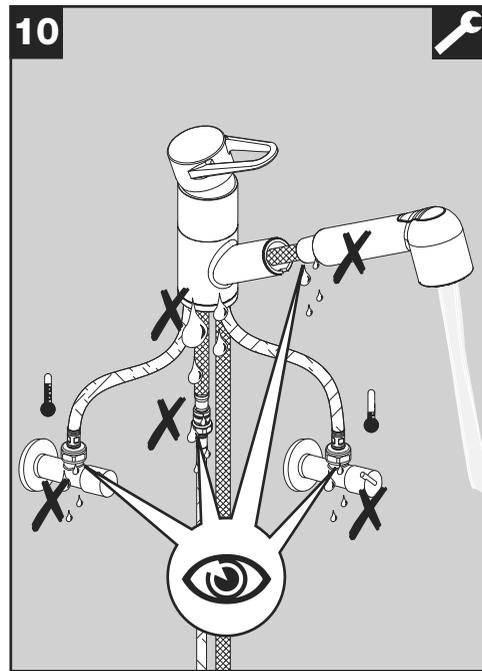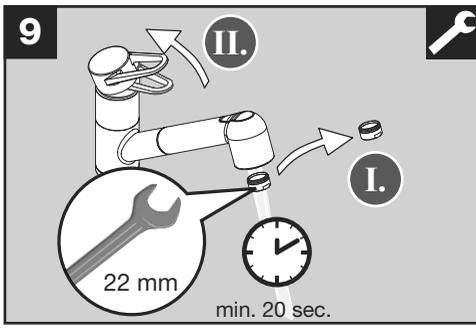

**BLANCO**

BLANCO AUSTRALIA PTY LTD · Service AU · Phone: +61 75 5960 894  
 blanco@t2services.com.au

铂浪高贸易(上海)有限公司 中国服务商 电话: 86-21-58355662/400-788-2100  
 info-blancochina@blanco.de · www.blanco.com.cn