

# BLANCO

## BLANCOWEGA-S II




≤ 70 °C  
≤ 158 °F

**Max Static Pressure:** 1000 kPa, **Min Pressure:** 150 kPa


**Recommended Dynamic Pressure:** 300 kPa

This installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS 3718.







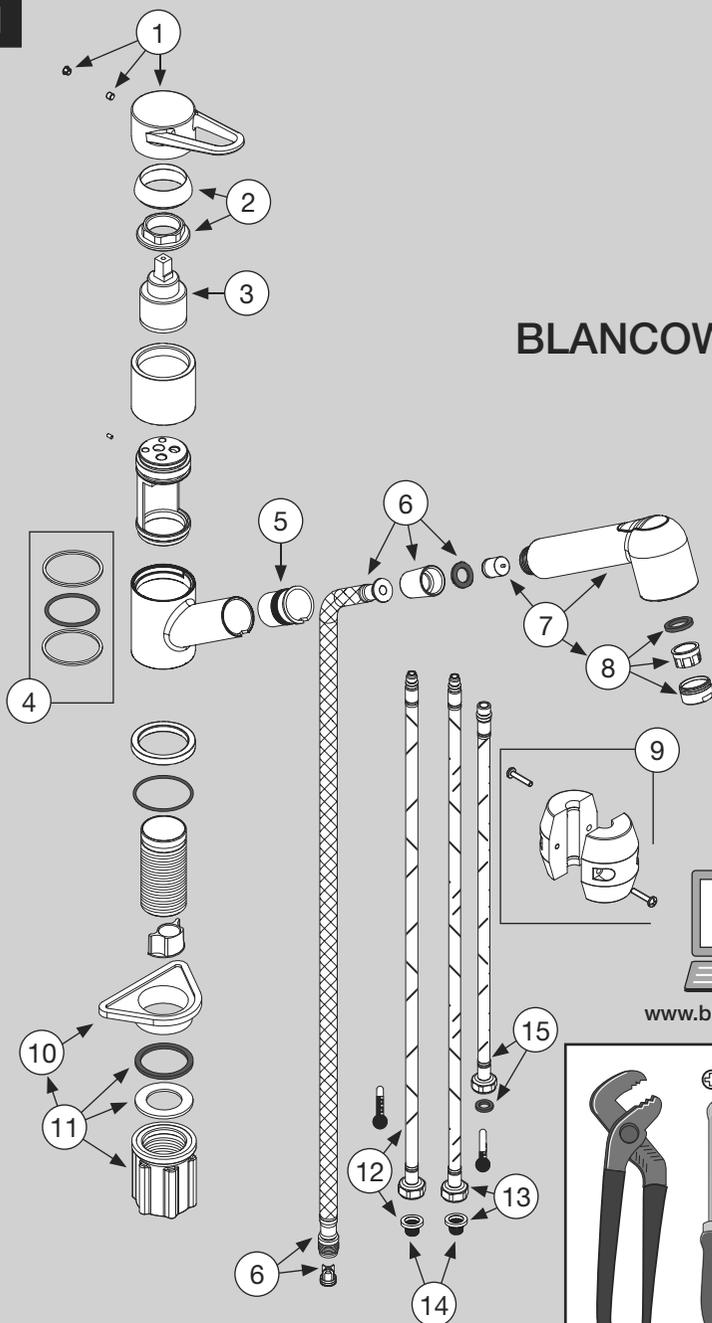









**1****i****BLANCOWEGA-S II**

[www.blanco.com/sos](http://www.blanco.com/sos)



- 1x 14 mm
- 1x 17 mm
- 1x 22 mm
- 1x 23 mm

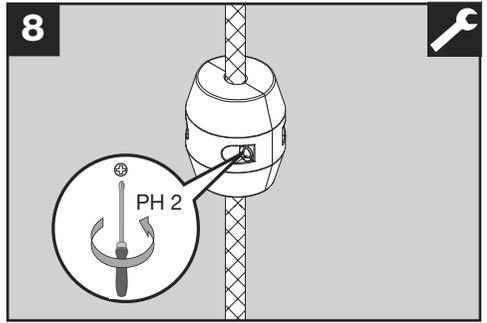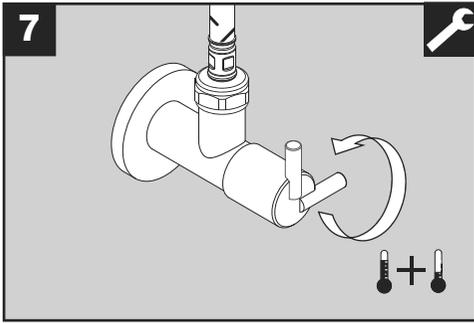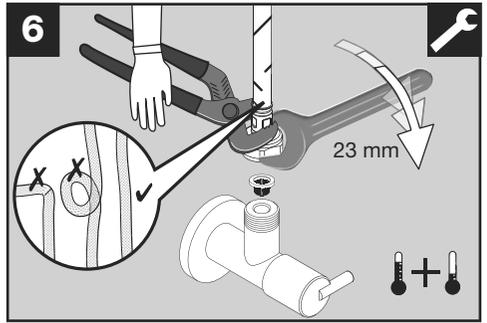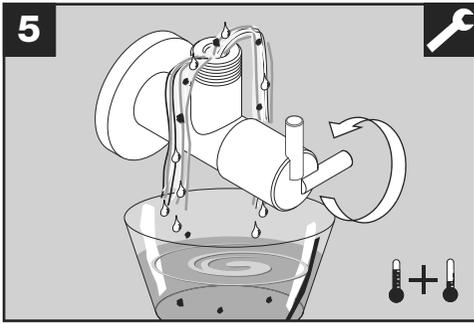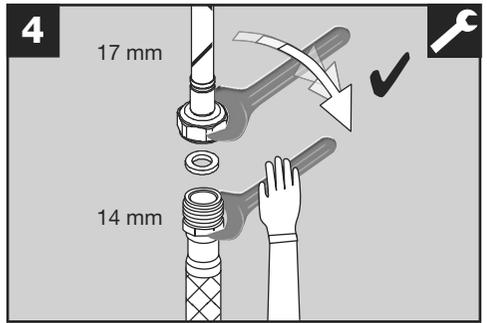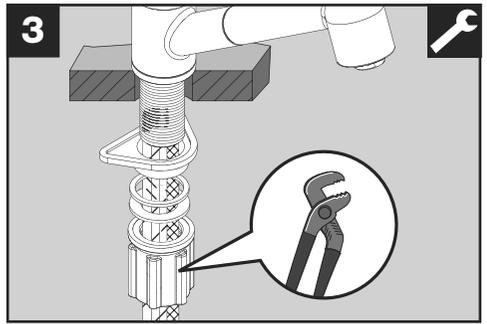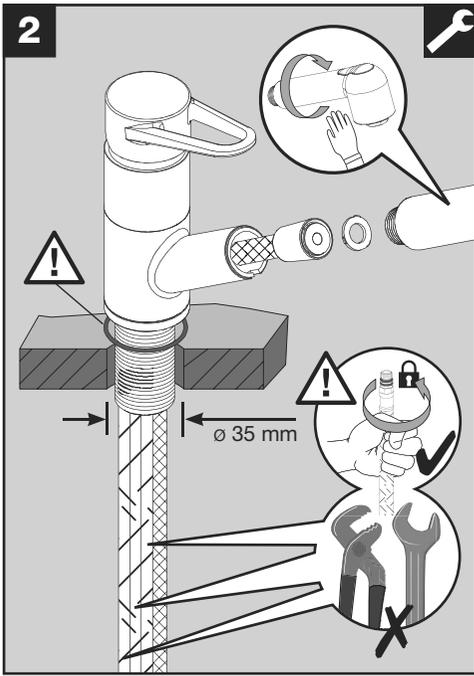

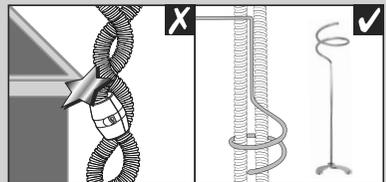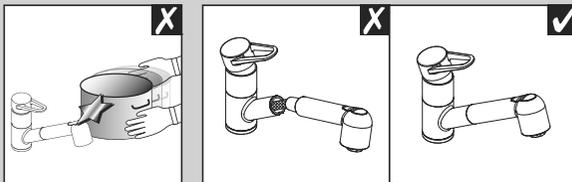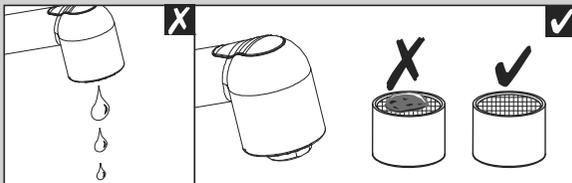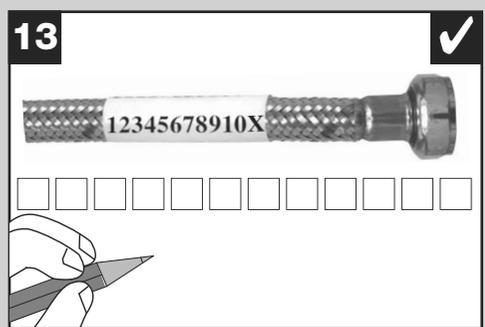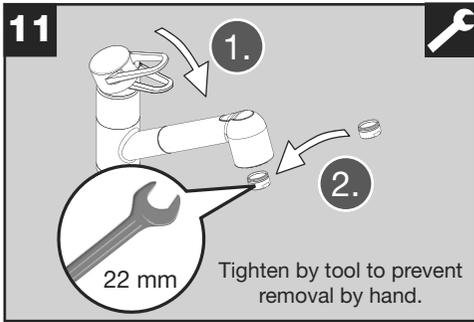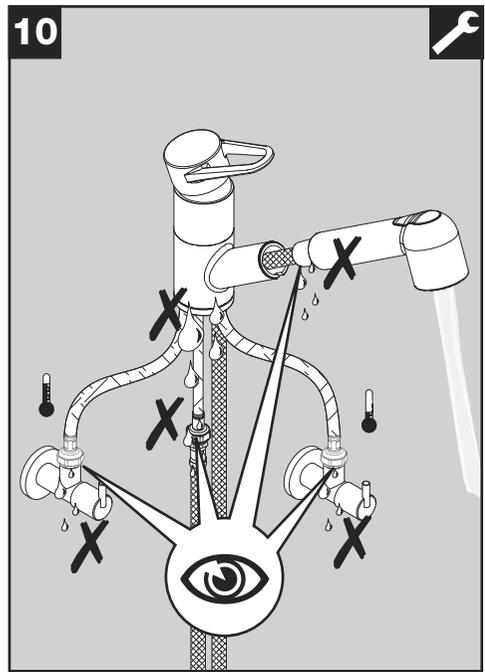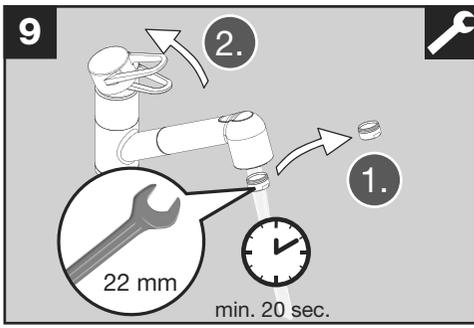

**BLANCO**

BLANCO AUSTRALIA PTY LTD · Service AU · Phone: +61 75 5960 894  
 blanco@t2services.com.au

伯浪高贸易(上海)有限公司 中国服务商 电话: 86-21-58355662/400-788-2100  
 info-blancochina@blanco.de · www.blanco.com.cn