
BLANCO


BLANCOWEGA-S II

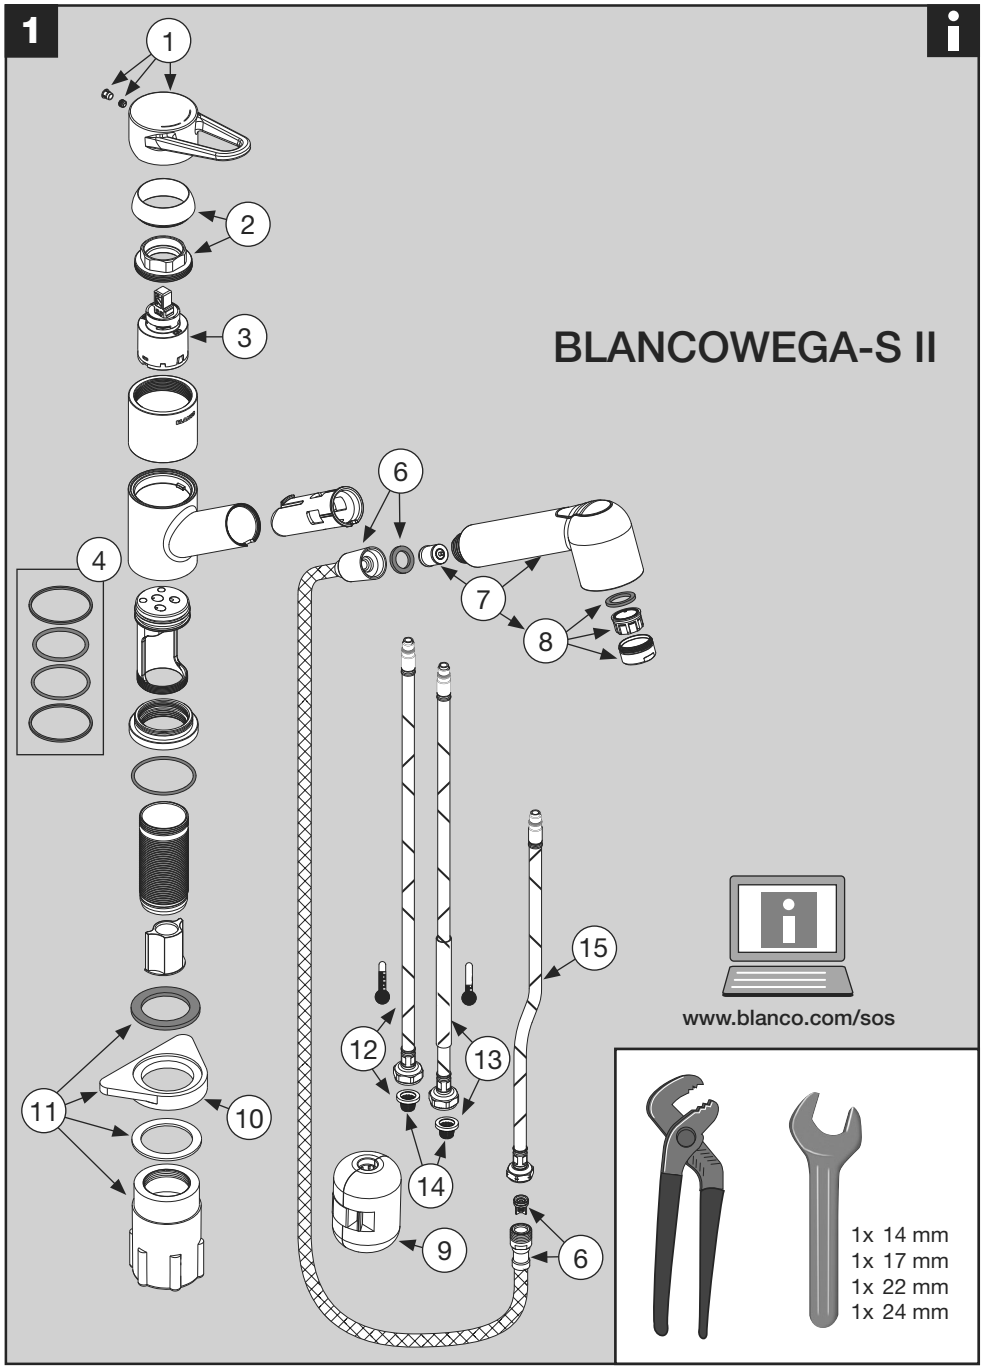



≤ 70 °C
≤ 158 °F


Max Static Pressure: 1000 kPa, **Min Pressure:** 150 kPa
Recommended Dynamic Pressure: 300 kPa
This installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS 3718.



1
BLANCOWEGA-S II
www.blanco.com/sos
1x 14 mm
1x 17 mm
1x 22 mm
1x 24 mm

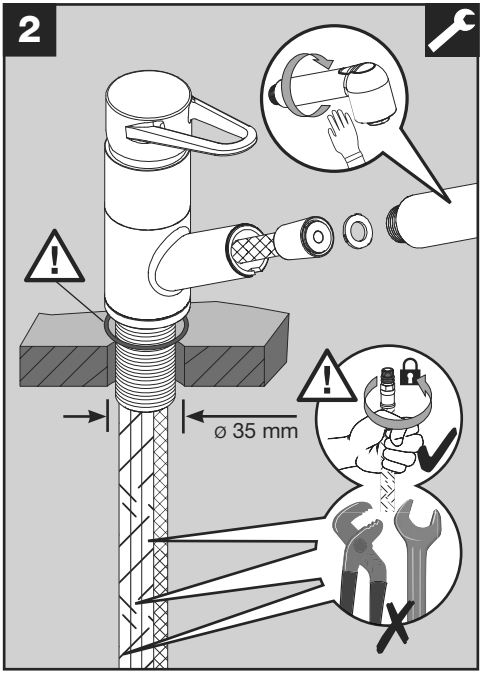

2
ø 35 mm

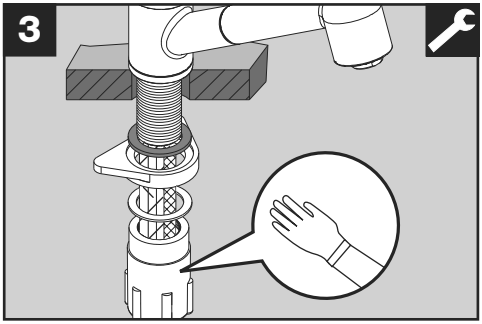

3

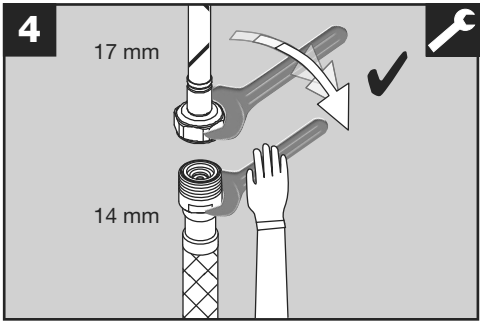

4
17 mm
14 mm

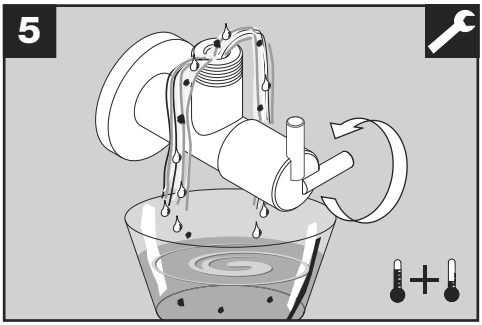

5

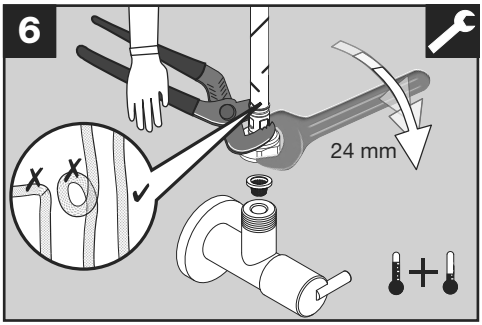

6
24 mm

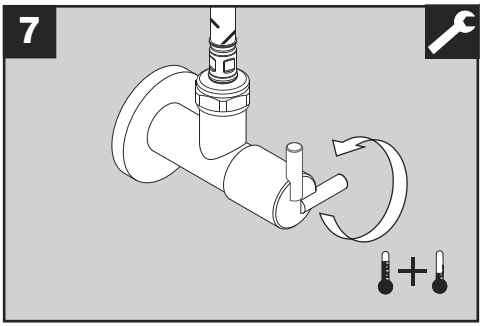

7

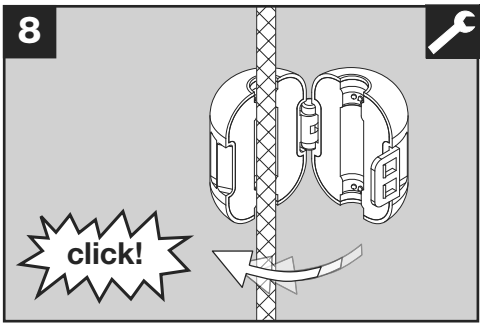

8
click!

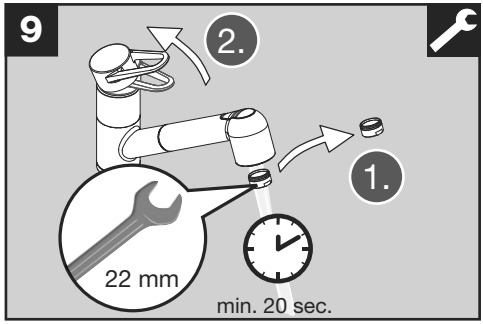


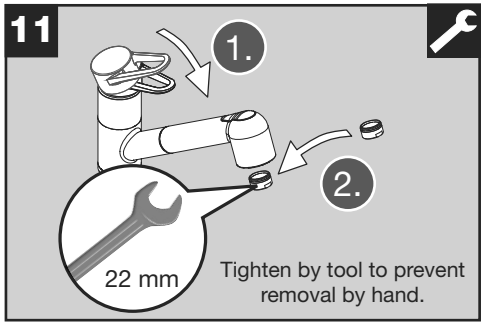


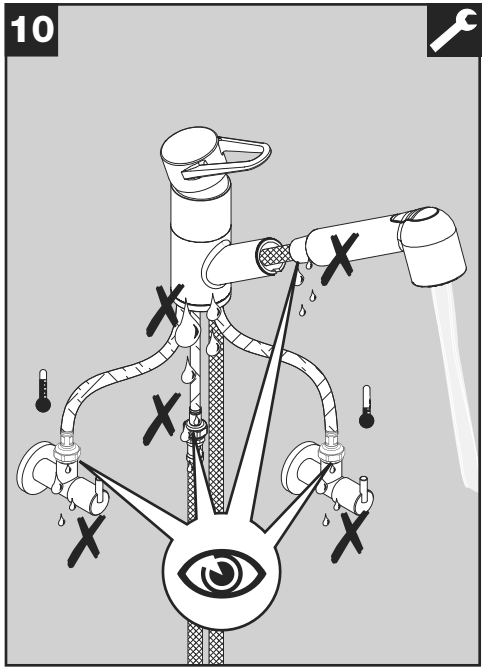


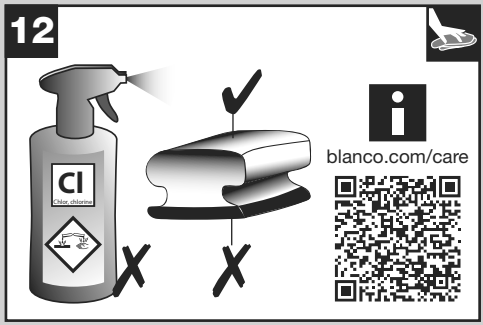


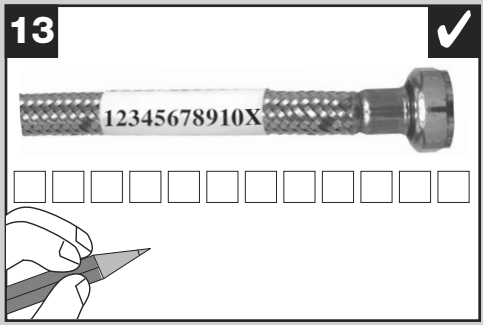


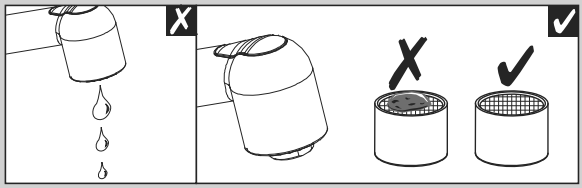

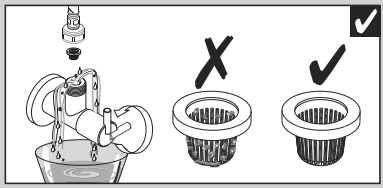



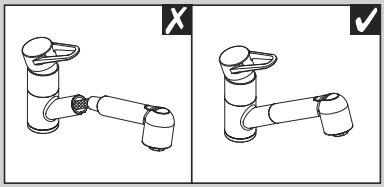

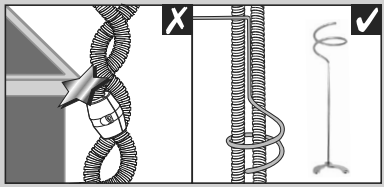

240 455 | Rev10 | 2025-11-28 | v24

BLANCO

BLANCO AUSTRALIA PTY LTD · Service AU · Phone: +61 75 5960 894
blanco@t2services.com.au

铂浪高贸易（上海）有限公司 **中国服**务商 电话：86-21-58355662/400-788-2100
info-blancochina@blanco.de · www.blanco.com.cn