

Congratulations for having invested in one of today's top quality faucets. BLANCO faucets are designed to match the latest in kitchen decors and are equipped with quality ceramic disc cartridges to ensure leak-free performance and precise temperature and water flow control.

CLEANING AND CARE

Use only water and mild soap to clean the faucet and a soft cloth to dry it. Never use detergents, abrasives, scouring pads or steel wool on this faucet. The use of these items will scratch and dull the surface and cause irreparable damage. Non compliance with BLANCO maintenance instructions will nullify the warranty

Limited Lifetime Warranty: Faucets

All faucets are thoroughly checked and tested in the factory. However, if the faucet has a manufacturing defect, BLANCO reserves the right to replace the damaged part or the entire faucet.

BLANCO warrants its faucets to be free from manufacturing defects in material and workmanship; and the finish and ceramic disc cartridge to be free from manufacturing defects and workmanship, to the original consumer purchaser of the faucet from the original date of purchase for as long as the original consumer purchaser owns their home. If the cartridge proves to be defective during the warranty period, BLANCO will provide a replacement free of charge.

Finish and ceramic disk cartridge LIFETIME*
(*Lifetime to original consumer purchaser)

Mechanical components, hand spray and hoses LIFETIME*
(*Lifetime to original consumer purchaser)

A new enhanced warranty program for faucets took effect April 15, 2010. (This is not retroactive to previously purchased faucets). It extends the previous 2-year limited period for mechanical components, hand spray and hoses to a limited lifetime warranty period. (As before, the finish and ceramic disc cartridge have limited lifetime warranties).

This warranty does not cover faucets which have been improperly installed or subject to improper use or used in a location other than a residential kitchen or faucets which have been damaged due to mineral deposits or the use of corrosive or abrasive cleaning agents. This warranty does not cover shipping costs, labour costs or any other cost associated with the installation or replacement of the product/parts and is extended only to the original consumer purchaser of the faucet.

BLANCO is not responsible or liable for indirect, special or consequential damages arising out of or in connection with the use or performance of its faucets and its liability under this warranty is limited to the replacement of the defective material at the location of purchase.

Obligation of the original owner

The original dated sales receipt must be retained by the customer and is the only acceptable proof of purchase.

BLANCO makes no additional warranties, expressed or implied and any implied warranty including that of merchantability or fitness for a particular purpose, is limited in its duration to the duration of the written limited warranties set forth herein.

No employee, agent or other person is authorized to provide any warranty on behalf of BLANCO for a BLANCO product that is in addition to or different from the warranty stated above unless the warranty has been previously approved by an authorized BLANCO representative.

This warranty gives you specific legal rights and you may also have other rights which may vary from province to province.

To obtain warranty service,
please call BLANCO Customer Service
toll free at 1-877-425-2626


BLANCO

ARTONA

BAR / PREP FAUCET, PULL-DOWN

TECHNICAL PRODUCT INFORMATION

Model 442039-442046, 403782

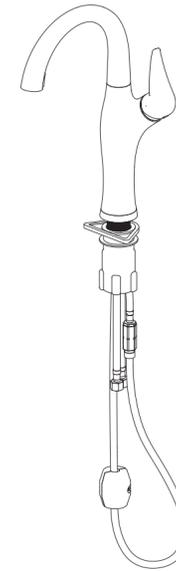


BLANCO CANADA INC.

100 CORPORATION DRIVE, BRAMPTON, ONTARIO, L6S 6B5
Toll Free Telephone/Téléphone sans frais 1-877-425-2626


BLANCO CANADA INC.

100 CORPORATION DRIVE, BRAMPTON, ONTARIO, L6S 6B5
Toll Free Telephone/Téléphone sans frais 1-877-425-2626

ARTONA

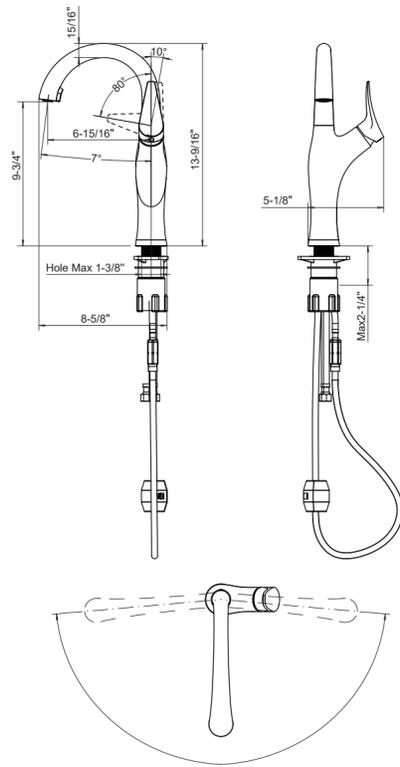

Rotated 180 degrees

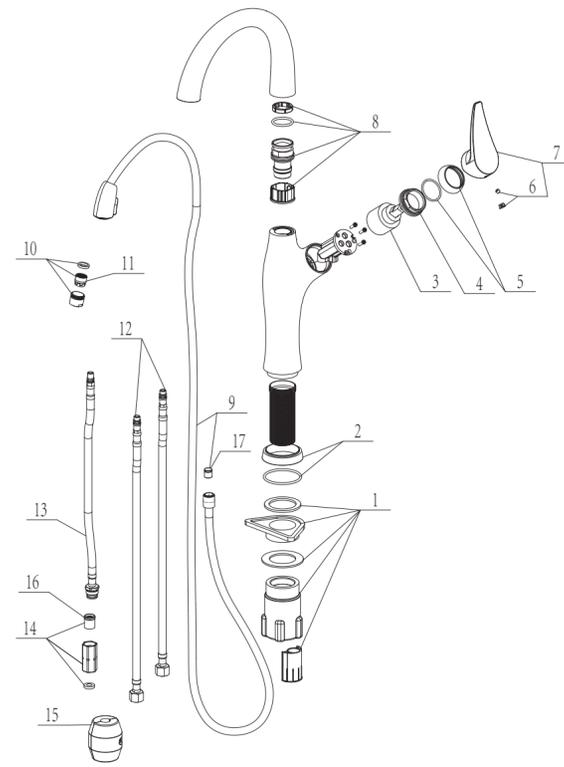

Faucet hole Φ 1-3/8"

INSTALLATION

Tools Needed :

- Adjustable wrench
- Channel lock pliers

Dimensional Requirements:

- MAXIMUM deck thickness is 2 1/4"
- Faucet Hole Size is 1-3/8"

1. Place faucet through 1-3/8" hole.
2. Secure faucet to sink/countertop using mounting hardware. The proper sequence of hardware is rubber washer, triangular reinforcement base, metal washer, mounting nut.
3. Before connecting supply lines to the water valves, flush each water valve to remove dirt and particles that can affect the functioning of the faucet and void warranty.
4. Connect Hot and Cold supply lines to hot and cold water valves. Hold line while tightening nut to prevent line from twisting. Do not over tighten.
5. Connect spray hose to copper outlet with rubber washer in the connection.
6. Attach counterweight to spray hose using rubber sleeve and screws provided.
7. Open water valves slowly and check connections for leaks.
8. Turn the faucet on and check for leaks.

PARTS

Diagram #	Description	Part #
1	Artona Mounting Kit	442106
2	ARTONA Base Chrome	442107
2	ARTONA Base Stainless	442123
3	Cartridge	442109
4	ARTONA Cartridge Lock Nut Chrome	442110
5	ARTONA Cartridge Cap Chrome	442111
5	ARTONA Cartridge Cap Stainless	442124
6	ARTONA Cap and Screw Chrome	442112
6	ARTONA Cap and Screw Stainless	442125
7	ARTONA Handle Chrome	442113
7	ARTONA Handle Stainless	442126
8	Set of rings	442114
9	ARTONA Bar Handspray & Hose	442115
10	Aerator Kit	442116
11	Aerator	442117
12	Supply lines	441554
13	Supply lines	442118
14	ARTONA Bar Hose Connection 2.2gpm	442119
15	Weight 230 grams	442120
16	Flow Restrictor w Check Valve 2.2gpm	442121
17	Spray Hose Check Valve	442122